



selt ✨
sun
protection
systems

Fabrics

Slat Colours
Construction Colours



TABLE OF CONTENTS

AWNING FABRICS.....	5
SOLID ACRYLIC FABRICS.....	8
WATERPROOF ACRYLIC FABRICS.....	16
ORCHESTRA ACRYLIC FABRICS	17
URBAN ACRYLIC FABRICS.....	18
LANDSCAPE MINI ACRYLIC FABRICS	19
LANDSCAPE ACRYLIC FABRICS	19
CLASSICAL ACRYLIC FABRICS.....	21
FANTASY ACRYLIC FABRICS.....	22
 SCREEN FABRICS	 29
SERGE 600.....	32
SERGE 1%.....	34
SERGE 600 BO LUNAR	35
ESSENTIAL 5 (POLYSCREEN 550)	36
ETHEREAL 10 (POLYSCREEN 350).....	38
SILKEN BO (POLYSCREEN 314 BO)	39
SOLTIS VEOZIP	40
SOLTIS 92	42
SOLTIS® 99	43
SUNWORKER	44
VEROGLIM ACOUSTIC.....	45
PERGOLA SOLID FABRICS.....	46
 POWDERCOATING.....	 48
SLAT COLOURS	50
CONSTRUCTION COLOURS	52



AWNING FABRICS



100%
ACRYLIC



Above pictograms apply to acrylic fabrics.

ACRYLIC FABRICS

Technical data shown below are average values of the current production Die angegebenen technischen Daten sind Durchschnittswerte der laufenden Produktion Les données techniques ci-dessous sont des valeurs moyennes de la production courante	ACRYLIC	
Fabric Gewebe Tissu		Acrylic 100%, solution dyed Acryl 100%, spinndüsengefärbt Acrylique, 100% teint masse
Finishing Ausrüstung Traitement		Teflon - Cleangard
Weight Gewicht Poids total	DIN EN 12127	~ 300 g/m²
Width Warenbreite Laize	DIN EN 1773	120 cm
Colour fastness Farbechtheit Solidité des coloris	DIN EN ISO 105-B02	7-8 / 8
Light fastness	DIN EN ISO 105-B04	7-8/8
Oil repellency Ölabweisung Oléofugation	EN ISO 14419	4-5
Water repellency Wasserabweisung Résistance au mouillage superficiel	EN ISO 4920	100
Water column Wassersäule Colonne d'eau	EN 20 811	~ 330 mm
Tensile strength (daN/5 cm) Höchstzugkraft (daN/5 cm) Résistance à la rupture (daN/5 cm)	DIN EN ISO 13934-1	~ 140 / 95
Tear resistance (daN) Weft/Warp Weiterreißkraft (daN) Schuss/Kette Résistance à la déchirure (daN) Trame/Chaine	EN ISO 13937-2	2.3 / 4

Acrylic fabrics guarantee the highest quality of the product, providing thermal comfort and protection against UV radiation. Made 100% out of acrylic fibre, dyed in chemical solution, provide excellent protection against colour loss. UV resistance coefficient is 7-8 at 8° scale. Impregnation with use of TEFLON® or SCOTCHGARD™ agents provides an excellent protective barrier and strengthens water-repellent qualities of the fabric, also preventing dirt adhering. Resistance to leaking: 330 mm water column. The advantage of acrylic fabric is also high resistance to tensile and tear.

WATERPROOF FABRICS




Technical data shown below are average values of the current production Die angegebenen technischen Daten sind Durchschnittswerte der laufenden Produktion Les données techniques ci-dessous sont des valeurs moyennes de la production courante	ACRYLIC WATERPROOF	
Fabric Gewebe Tissu		Acrylic 100%, solution dyed Acryl 100%, spinndüsengefärbt Acrylique 100% teint masse
Finishing Ausrüstung Traitement		Teflon - Cleangard
Weight Gewicht Poids total	DIN EN 12127	~ 330 g/m ²
Width Warenbreite Laize	DIN EN 1773	120 cm
Colour fastness Farbechtheit Solidité des coloris	DIN EN ISO 105-B02	7-8 / 8
Light fastness	DIN EN ISO 105-B04	7-8/8
Oil repellency Ölabweisung Oléofugation	EN ISO 14419	4-5
Water repellency Wasserabweisung Résistance au mouillage superficiel	EN ISO 4920	100
Water column Wassersäule Colonne d'eau	EN 20 811	~ 1000 mm
Tensile strength (daN/5 cm) Höchstzugkraft (daN/5 cm) Résistance à la rupture (daN/5 cm)	DIN EN ISO 13934-1	~ 140 / 95
Tear resistance (daN) Weft/Warp Weiterreißkraft (daN) Schuss/Kette Résistance à la déchirure (daN) Trame/Chaîne	EN ISO 13937-2	3 / 4

Waterproof acrylic fabrics are characterized by increased resistance to leaking - about 1000 mm water column. Weave structure together with modern impregnation technology provides high air permeability even on hot days. Oeko-Tex® guarantees that offered acrylic fabrics, subjected to special impregnation for water resistance, are not toxic.

SOLID

ACRYLIC FABRICS

BLANCO

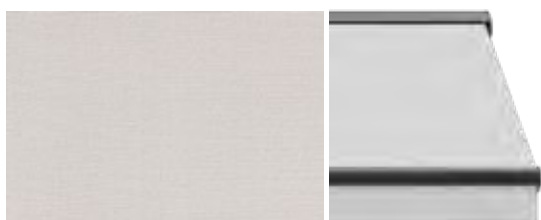


2042 UV: 97% GTOT: 18%

TANDEM BLANCO




8442 UV: 40% GTOT: 18%

NATURAL

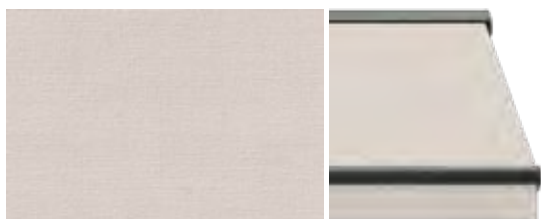


2929 UV: 97% GTOT: 18%

MARFIL

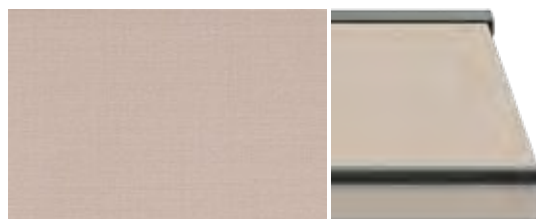


2143 UV: 97% GTOT: 16%

SIROCO

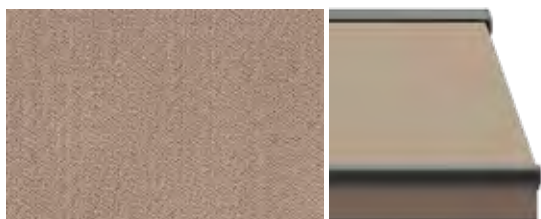

2226 UV: 98% GTOT: 12%

VANILLA

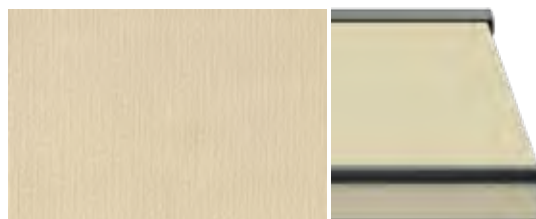


2687 UV: 97% GTOT: 17%

AMBER BEIGE




0814 UV: 99% GTOT: 15.66%

BEIGE

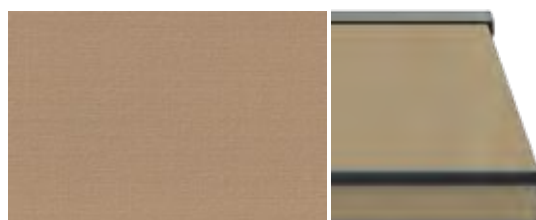

2038 UV: 99% GTOT: 11%

INTEGRAL

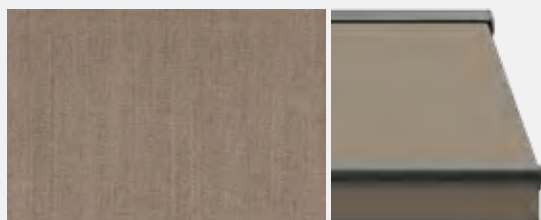


2838

UV: 99%

GTOT: 8%

BERNA

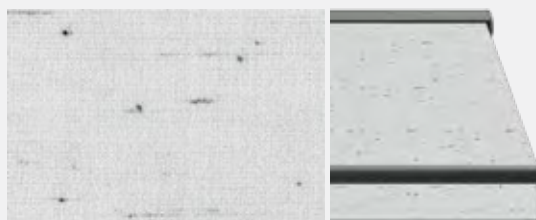


2041

UV: 97%

GTOT: 16%

OLIVE GREEN

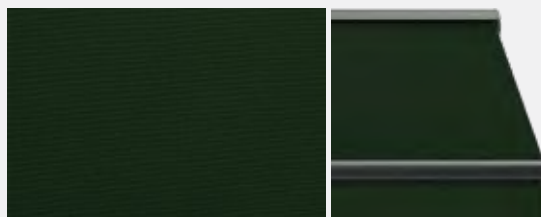


0007

UV: 97,5%

GTOT: 2%

GRAPHITE MELANGE

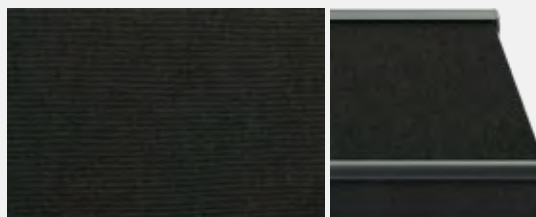


0107

UV: 97,5%

GTOT: 2%

ALABASTER

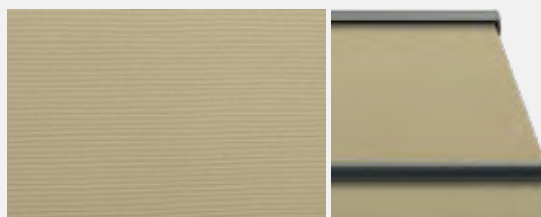


0151

UV: 97,5%

GTOT: 13%

LAGOON

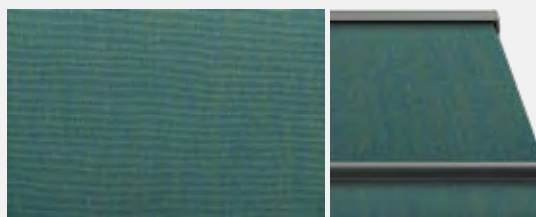


1063

UV: 98%

GTOT: 8%

MARMOL

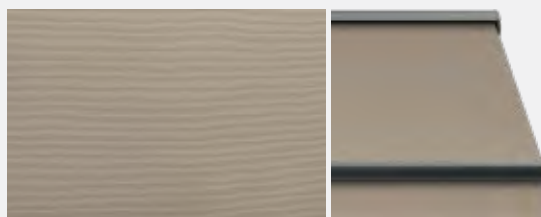


1070

UV: 98%

GTOT: 7%

RAIN

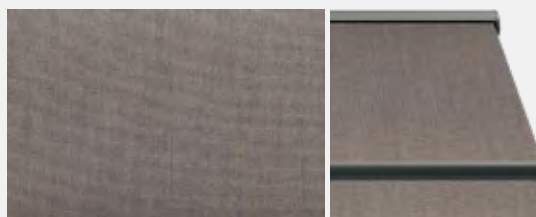


1073

UV: 99%

GTOT: 16%

SHELL

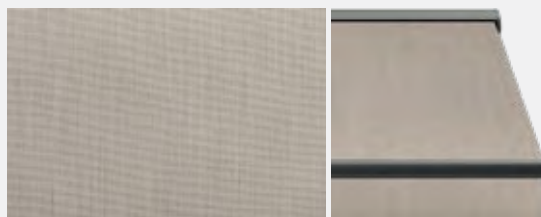


1469

UV: 97%

GTOT: 16%

TITANE PIGUE

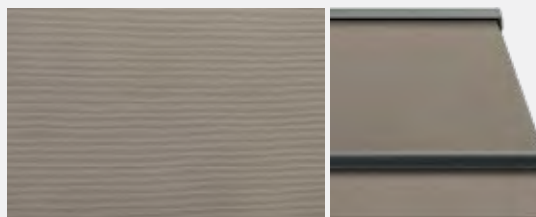


6088

UV: 95%


GTOT: 5%

PLATINUM PIGUE

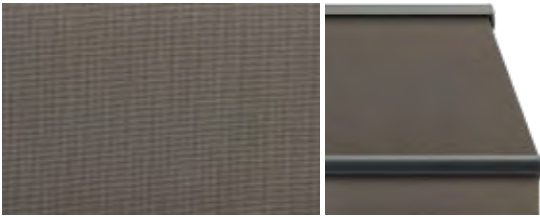


U407 UV: 95% GTOT: 3%

ETAIN LINK

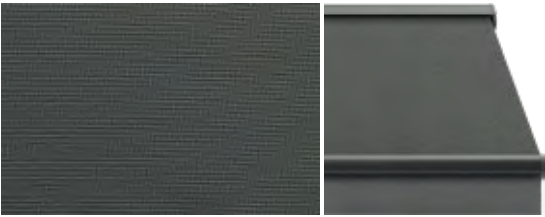


U786 UV: 100% GTOT: 1%

CELESTE LINK

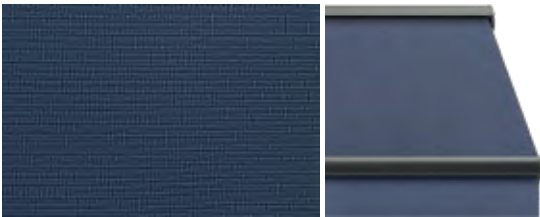


U795 UV: 100% GTOT: 3%

MAGMA LINK

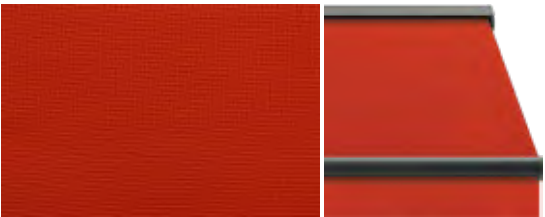


U808 UV: 95% GTOT: 13%

AVENA

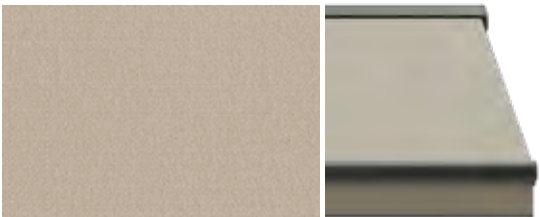


2296 UV: 98% GTOT: 11%

LIN MELANGE

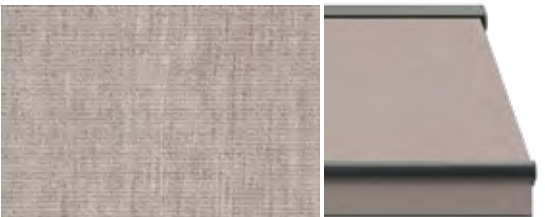


8904 UV: 95% GTOT: 11%

TWEED BROWN

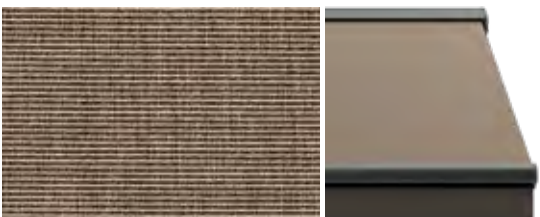


0403 UV: 99% GTOT: 6.82%

MINERAL

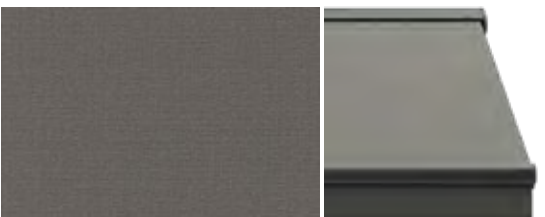


2831 UV: 99% GTOT: 7%

VISION

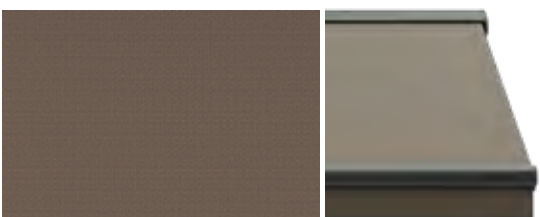


2250 UV: 99% GTOT: 7%

CHAUME PIGUE

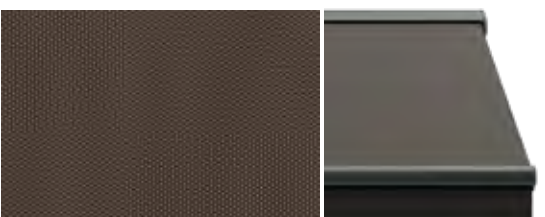

U235 UV: 100% GTOT: 9%

CAFE

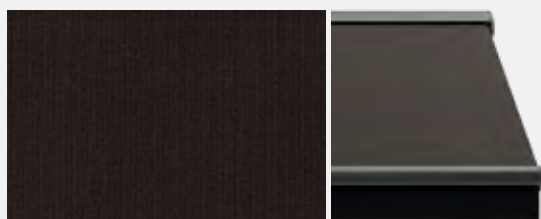

2316

UV: 99%

GTOT: 5%

MARBLE




0923

UV: 99%

GTOT: 12.8%

TWEED LATTE

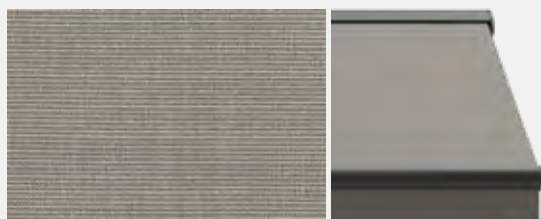


7926

UV: 98%

GTOT: 15%

SNOWFLAKE

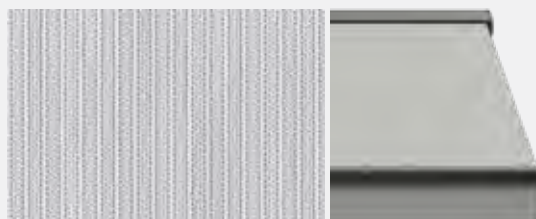

3463

UV: 95%

GTOT: 22%

TWEED ARGENT




0794

UV: 98%

GTOT: 19%

DARK LINEN

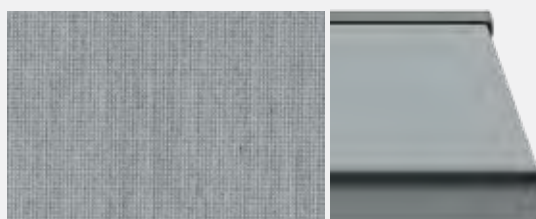


6727

UV: 98%

GTOT: 18%

SILVER WHITE

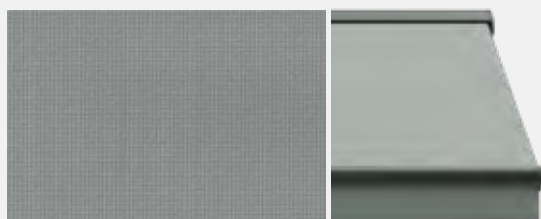


0364

UV: 99%

GTOT: 7.67%

SILVER MELANGE

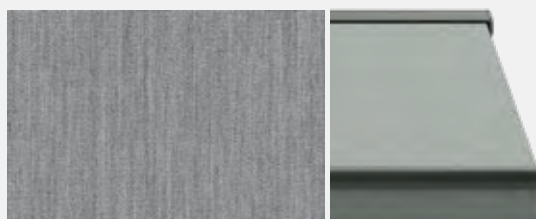

0028

UV: 99%

GTOT: 7.36%

TANDEM PIEDRA




8445

UV: 80%

GTOT: 7%

IRON

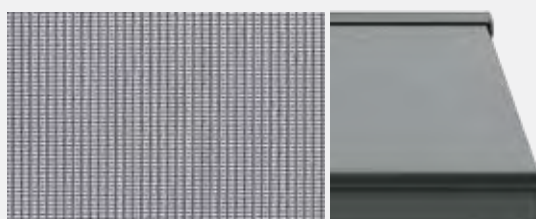


0937

UV: 99%


GTOT: 6.57%

TWEED ROCK

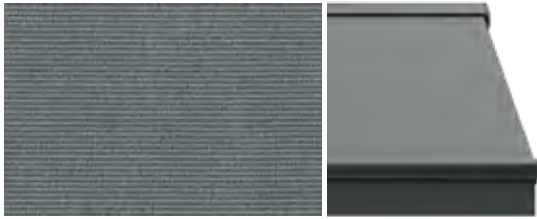


7151 UV: 98% GTOT: 11%

SILVER

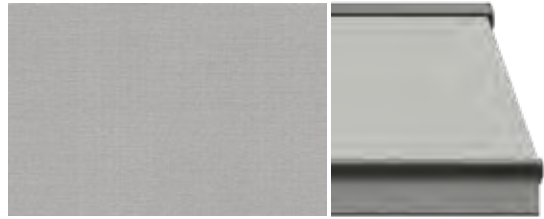


2821 UV: 97% GTOT: 13%

SILVER GREY

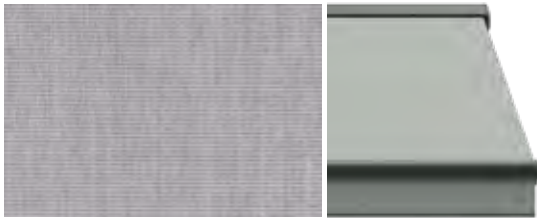


U190 UV: 90% GTOT: 15%

ZIP GREY

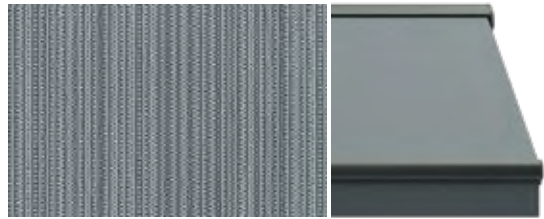


1597 UV: 98% GTOT: 13%

PIETRA BEIGE

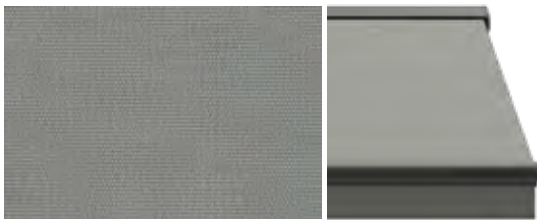


9415 UV: 98% GTOT: 8%

PERLA

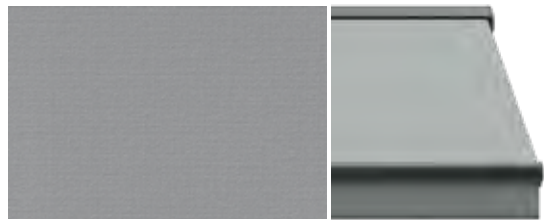


2979 UV: 97% GTOT: 8%

ASH

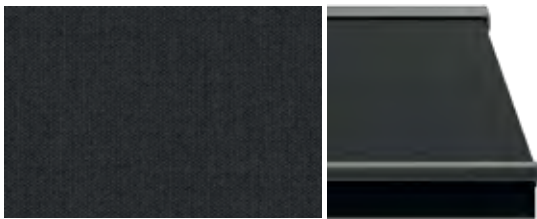

0638 UV: 99% GTOT: 5.05%

ANTRACITA

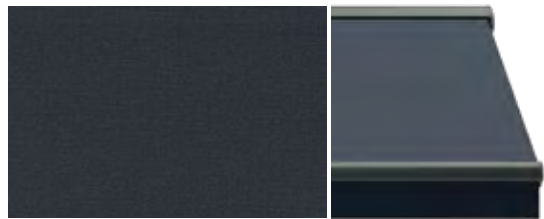

8488 UV: 99% GTOT: 6%

TANDEM GRAFITO




8446 UV: 80% GTOT: 6%

EBONY TWEED



7324 UV: 98% GTOT: 10%

NEGRO

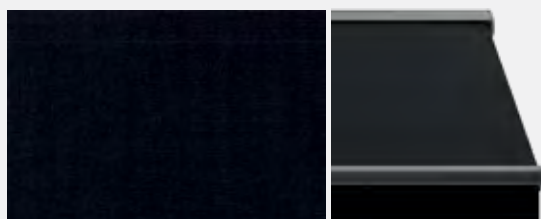


2170

UV: 99%

G_{TOT}: 5%

GRAPHITE ZIP

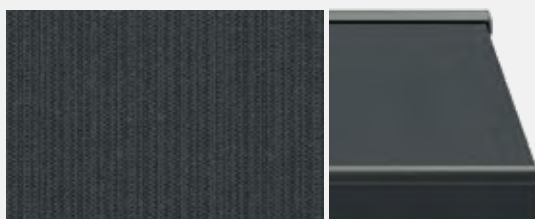


1524

UV: 98%

G_{TOT}: 12%

BASALT

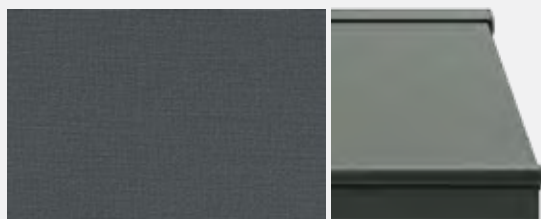


8203

UV: 100%

G_{TOT}: 5%

FLANELLE

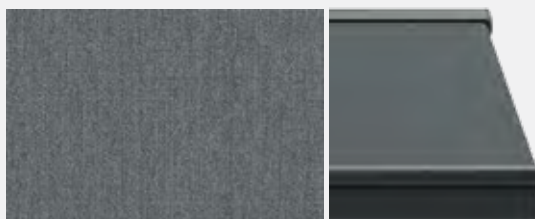


U104

UV: 100%

G_{TOT}: 5%

CHARCOAL TWEED

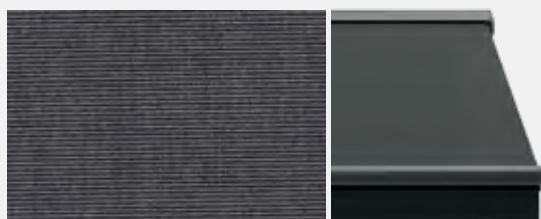


0402

UV: 99%

G_{TOT}: 5%

STITCH ANDESITE

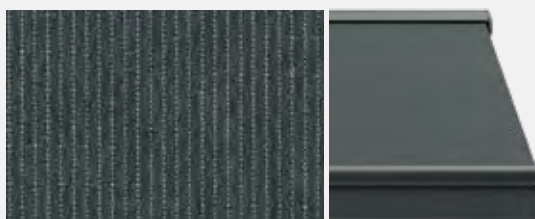


0512

UV: 98%

G_{TOT}: 8%

STITCH CALCITE

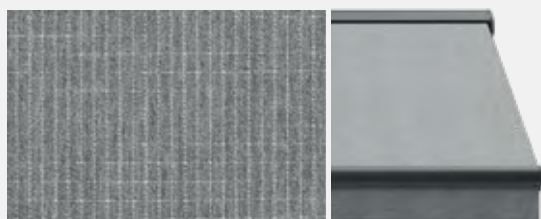


0505

UV: 98%

G_{TOT}: 9%

STITCH RUBY

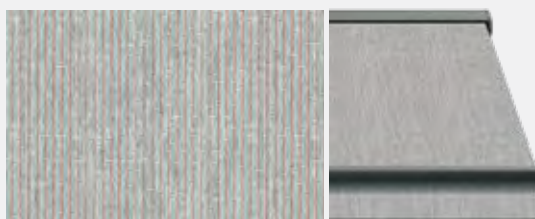


0507

UV: 98%

G_{TOT}: 9%

WHITE LINEN

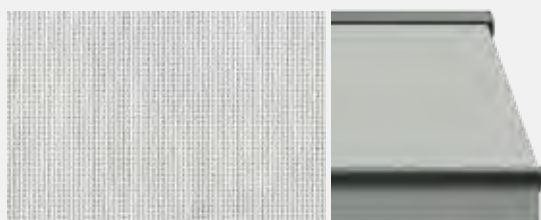


8615

UV: 95%

G_{TOT}: 18%

PLATINUM

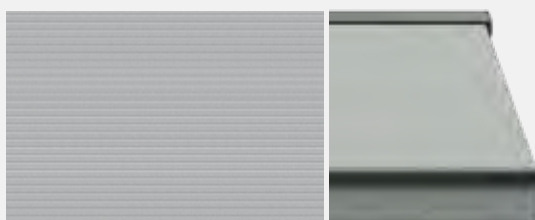


0715

UV: 90%

G_{TOT}: 12%

BREEZE

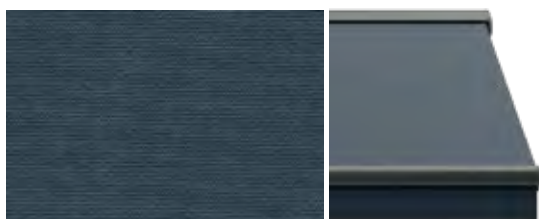


2777

UV: 99%

G_{TOT}: 6%

MARINE

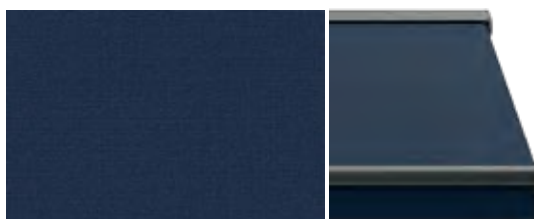


2145

UV: 99%

G_{TOT}: 5%

AZUL

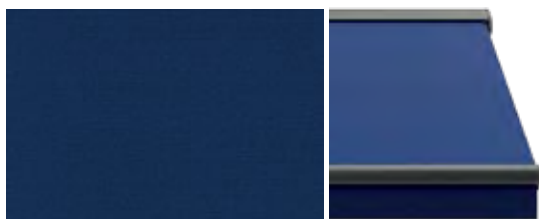


2018

UV: 99%

G_{TOT}: 7%

ORANGE

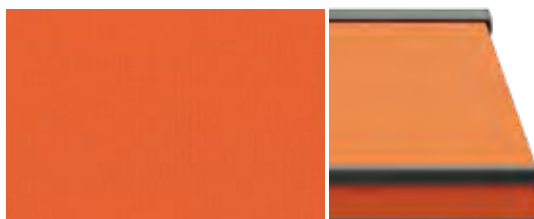

2050

UV: 99%

G_{TOT}: 13%

BRIGHT RED




2211

UV: 99%

G_{TOT}: 10%

RIOJA

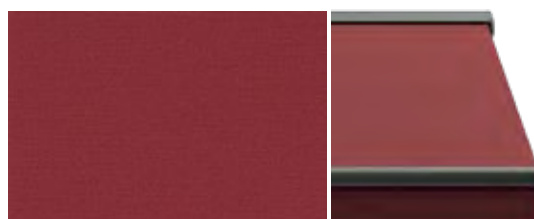


2210

UV: 99%

G_{TOT}: 8%

CARMIN PIGUE

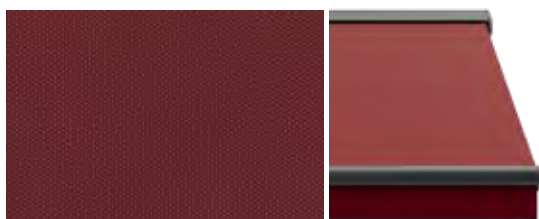


U411

UV: 100%

G_{TOT}: 10%

GRANATE

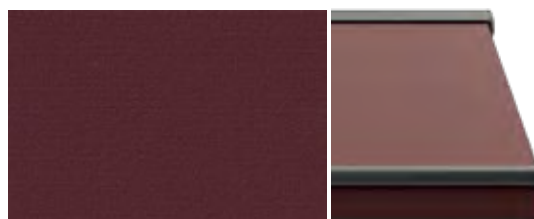


2101

UV: 99%

G_{TOT}: 6%

CURRY

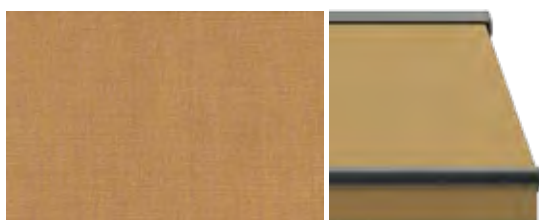

U105

UV: 100%

G_{TOT}: 12%

AMARILLO




2013

UV: 99%

G_{TOT}: 15%

OCRE

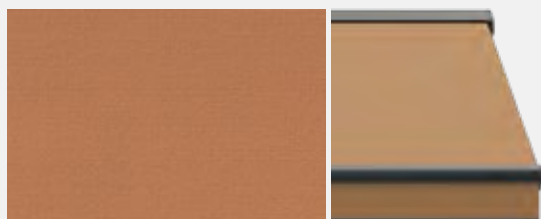


2180

UV: 99%

G_{TOT}: 13%

JADE

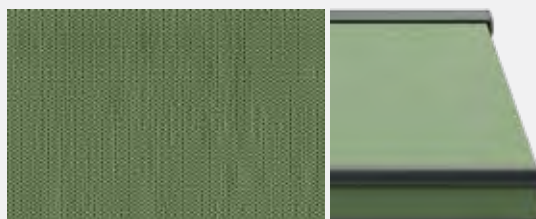


0396

UV: 99%

G_{TOT}: 8.12%

VERDE BOTELLA

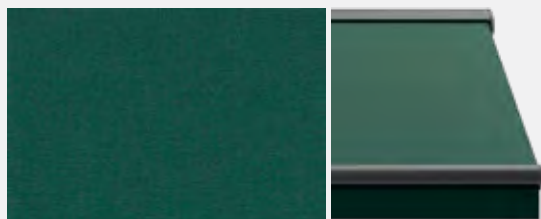

2245


UV: 99%

G_{TOT}: 6%

WATERPROOF

ACRYLIC FABRICS

BLANCO

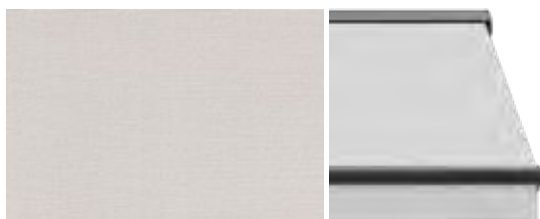


8268

UV: 97%

GTOT: 18%

MARFIL

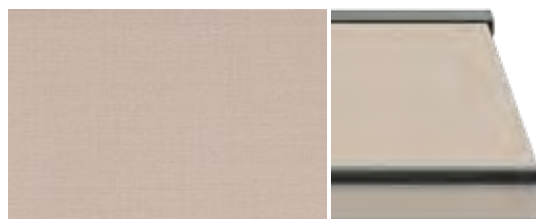

8272

UV: 97%

GTOT: 16%

AMARILLO




8265

UV: 99%

GTOT: 15%

COCO

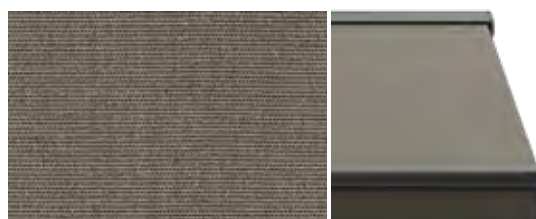


2047

UV: 99%

GTOT: 9%

GRIS

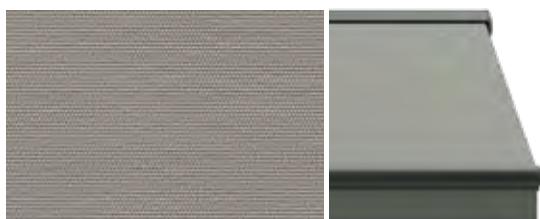


8271

UV: 99%

GTOT: 7%

ANTRACITA

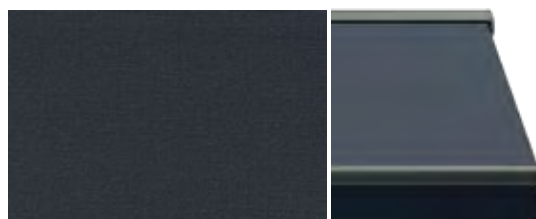


2796

UV: 99%

GTOT: 6%

TWEED NEGRO

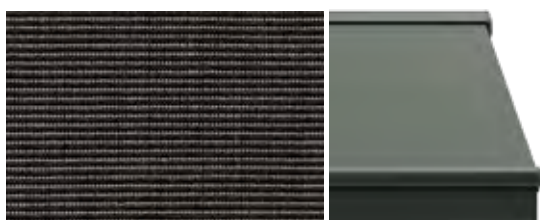


2085

UV: 99%

GTOT: 6%

NEGRO

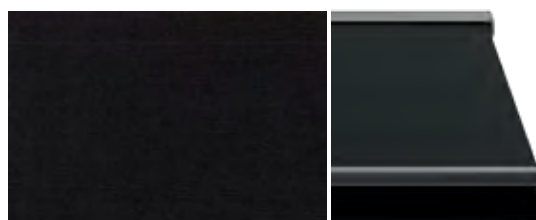


8275

UV: 99%

GTOT: 5%

TOAST WATERPROF

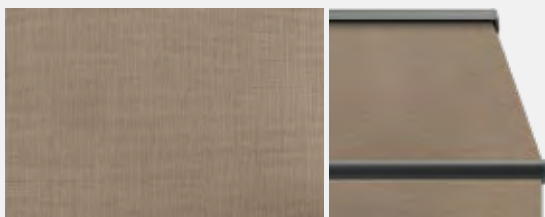


1470

UV: 98%

GTOT: 12%

TWEED GRIS WATERPROF

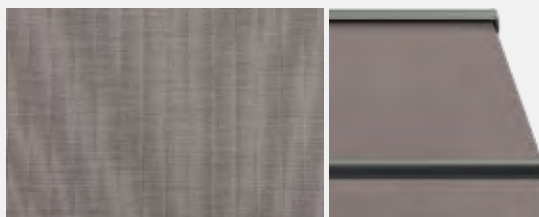

3581


UV: 99%

GTOT: 7%

ECO WEAVE

ACRYLIC FABRICS

MALENCO

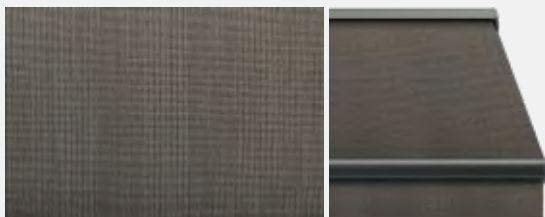


3802

UV: 96%

GTOT: 4%

RITTEN

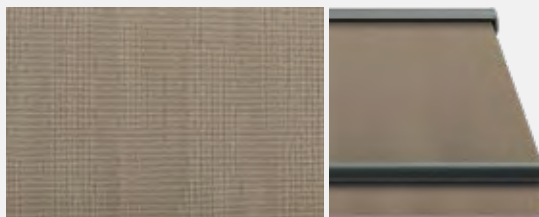


3702

UV: 96%

GTOT: 6%

SECEDA

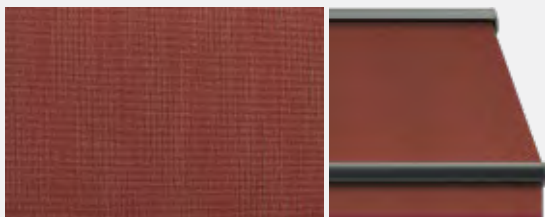


3401

UV: 96%

GTOT: 7%

MARMOLADA

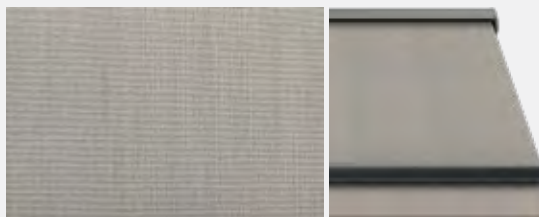

3101


UV: 96%

GTOT: 10%

LANDSCAPE


ACRYLIC FABRICS

GOBI

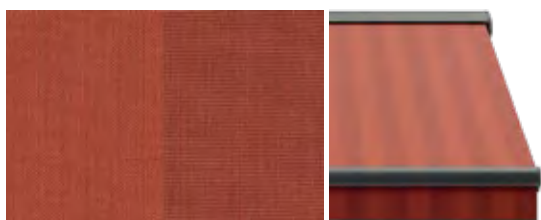


4658 UV: 99% GTOT: 11.32% RAPPORT: 24 cm

BEACH

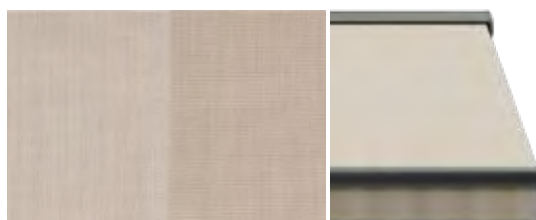


4662 UV: 99% GTOT: 16.37% RAPPORT: 24 cm

SAHARA DUST

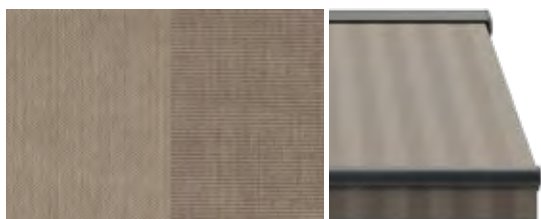

4639 UV: 99% GTOT: 10.18% RAPPORT: 24 cm

CLIFFS

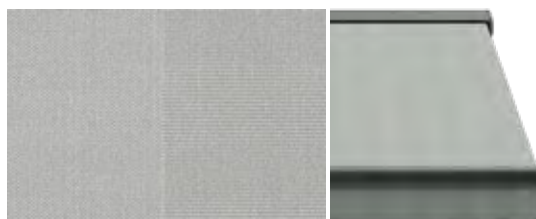

4643 UV: 99% GTOT: 6.78% RAPPORT: 24 cm

LADAKH



4655 UV: 99% GTOT: 5.91% RAPPORT: 24 cm

FJORD




4644 UV: 99% GTOT: 7.8% RAPPORT: 24 cm

NAMIB



4640 UV: 99% GTOT: 5.04% RAPPORT: 24 cm

VULCANO

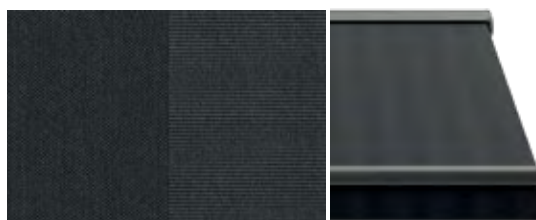


4665 UV: 99% GTOT: 5% RAPPORT: 24 cm

LANDSCAPE MINI


ACRYLIC FABRICS

CLAY

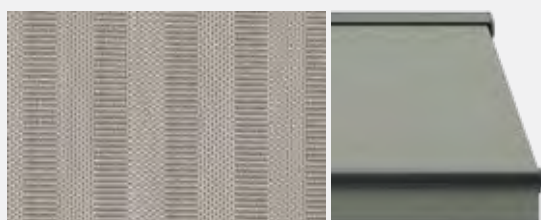


4627 UV: 99% G_{TOT}: 11.3% RAPPORT: 2 cm

SAND

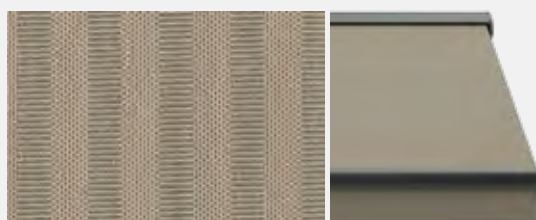

4620 UV: 99% G_{TOT}: 11.4% RAPPORT: 2 cm

GRAVEL

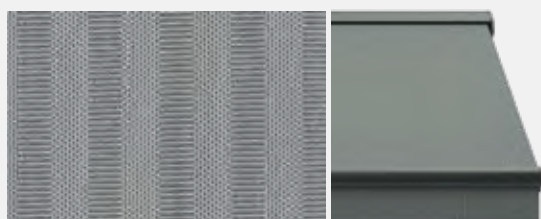


4621 UV: 99% G_{TOT}: 8.1% RAPPORT: 2 cm

ORCHESTRA


ACRYLIC FABRICS

NAPLES LINEN

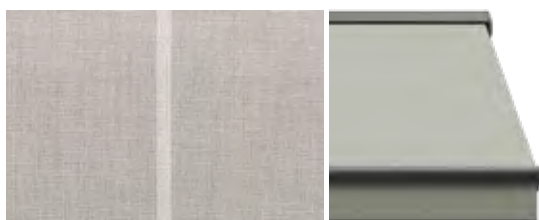


D307 UV: 95% GTOT: 13% RAPPORT: 20 cm

NAPLES HEATHER

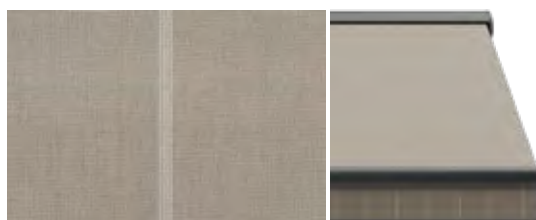


D305 UV: 90% GTOT: 11% RAPPORT: 20 cm

NAPLES LIGHT GREY

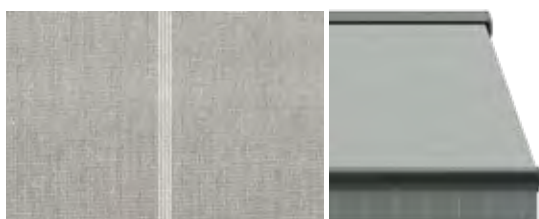


D304 UV: 90% GTOT: 11% RAPPORT: 20 cm

NAPLES STONE

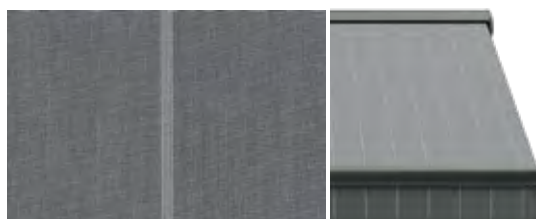


D113 UV: 95% GTOT: 7% RAPPORT: 20 cm

PENCIL YELLOW

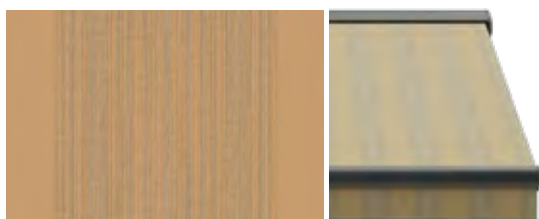

D323 UV: 95% GTOT: 13% RAPPORT: 30 cm

PENCIL DARK GREY

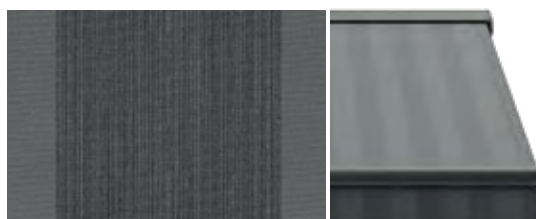


D319 UV: 100% GTOT: 8% RAPPORT: 30 cm

URBAN


ACRYLIC FABRICS

CANDLELIGHT

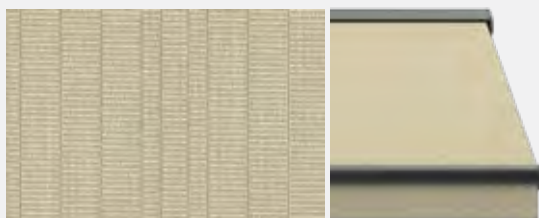


0990 UV: 99% G_{TOT}: 14% RAPPORT: 6 cm

CONCRETE

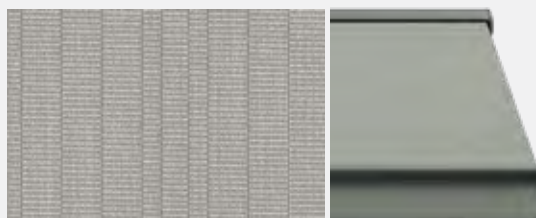

0993 UV: 99% G_{TOT}: 10.8% RAPPORT: 6 cm

TIMBER

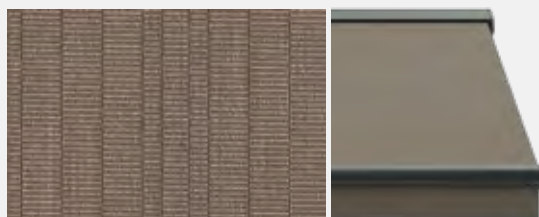


0992 UV: 99% G_{TOT}: 9.6% RAPPORT: 6 cm

CLASSICAL


ACRYLIC FABRICS

CLASSICAL GRIS

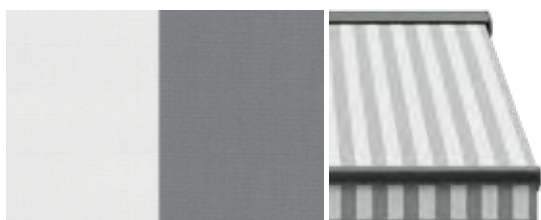


2103 UV: 97% GTOT: 16% RAPPORT: 20 cm

CLASSICAL AMARILLO

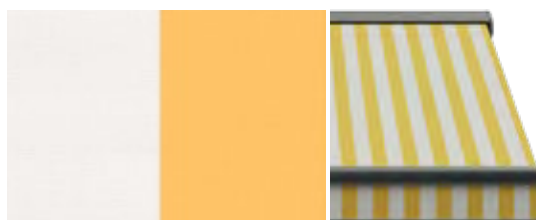


2015 UV: 97% GTOT: 15% RAPPORT: 20 cm

CLASSICAL MOSSY TWEED

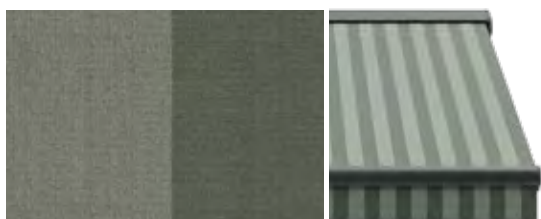


9878 UV: 98% GTOT: 15% RAPPORT: 20 cm

CLASSICAL BEIGE

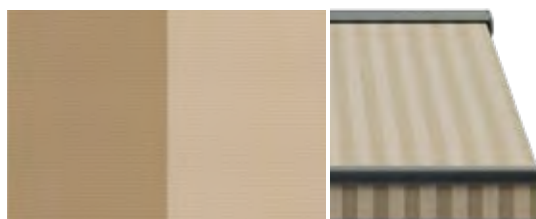


2275 UV: 98% GTOT: 14% RAPPORT: 20 cm

CLASSICAL MARRON-BEIGE

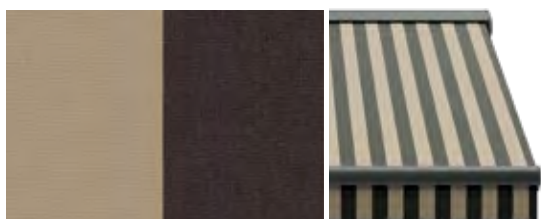

2148 UV: 99% GTOT: 9% RAPPORT: 20 cm

CLASICAL NEGRO

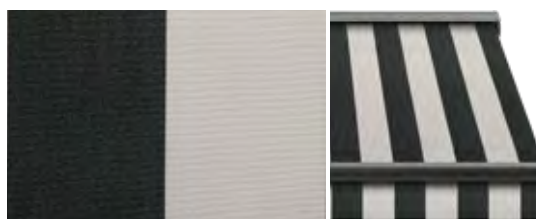


2171 UV: 99% GTOT: 6% RAPPORT: 20 cm

FANTASY


ACRYLIC FABRICS

MILANO

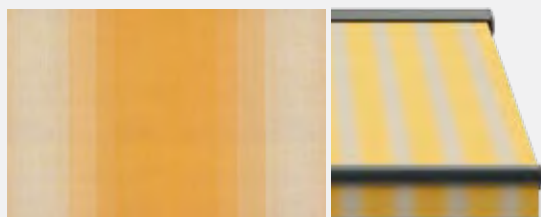


3868 UV: 95% GTOT: 22% RAPPORT: 30 cm

CALGARY

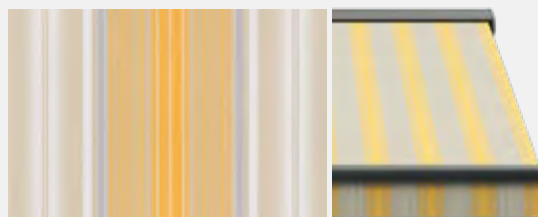


6712 UV: 95% GTOT: 16% RAPPORT: 30 cm

SUNRISE

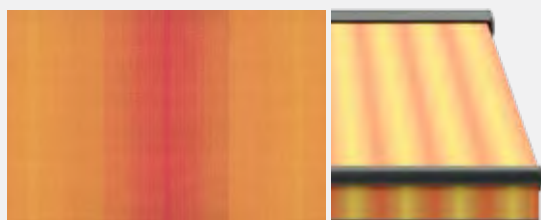


0180 UV: 99% GTOT: 14.73% RAPPORT: 30 cm

PALERMO

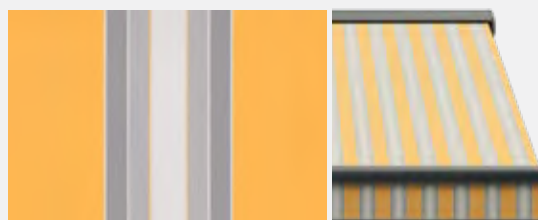


3605 UV: 90% GTOT: 21% RAPPORT: 17 cm

ARGENTINA

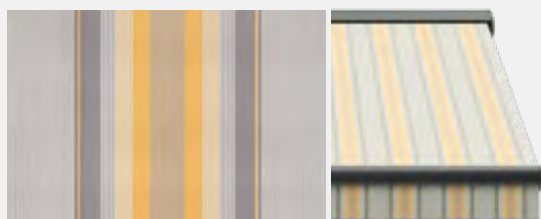


2016 UV: 98% GTOT: 15% RAPPORT: 30 cm

CANBERRA

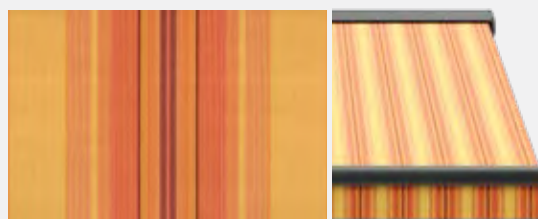


0452 UV: 98.75% GTOT: 15.51% RAPPORT: 24 cm

DAKAR

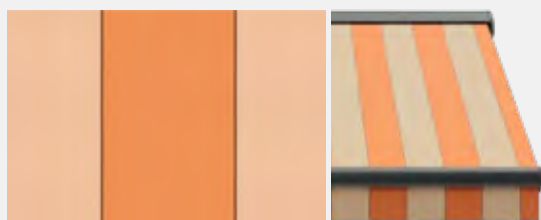


2080 UV: 98% GTOT: 15% RAPPORT: 40 cm

SALERNO

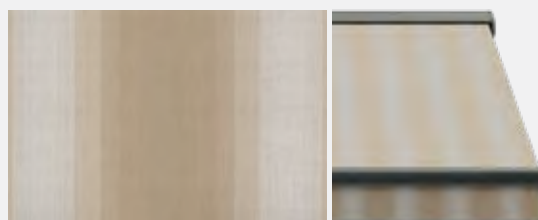


3861 UV: 90% GTOT: 20% RAPPORT: 30 cm

ALBERTA

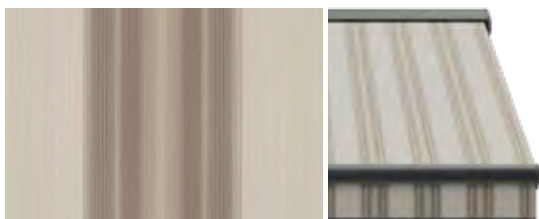


5106 UV: 98% GTOT: 15% RAPPORT: 30 cm

MANCHESTER

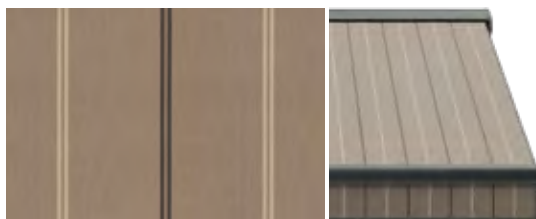


2823 UV: 98% GTOT: 8% RAPPORT: 24 cm

HARDELOT NATURE

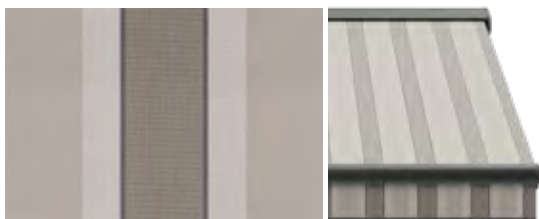


8935 UV: 95% GTOT: 14% RAPPORT: 30 cm

SIENNE NATURE

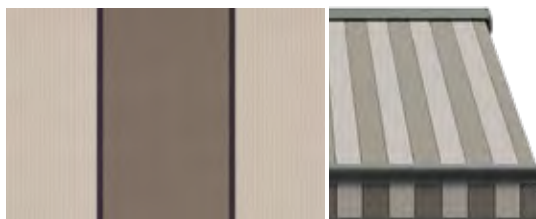


D100 UV: 95% GTOT: 14% RAPPORT: 30 cm

TEXAS

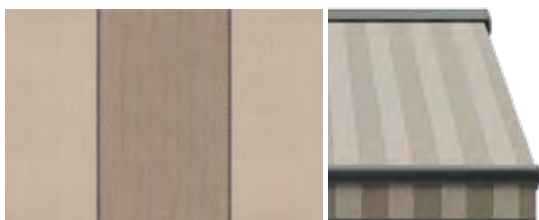


2238 UV: 98% GTOT: 13% RAPPORT: 30 cm

PERU

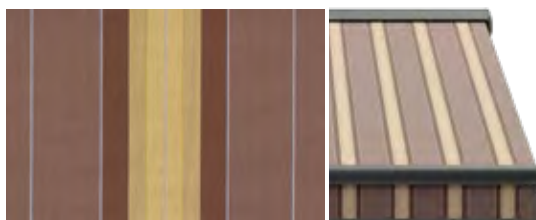


2201 UV: 98% GTOT: 14% RAPPORT: 30 cm

ANDRIA

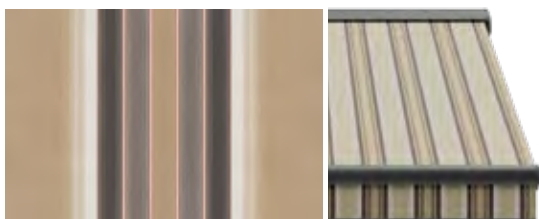


3881 UV: 95% GTOT: 18% RAPPORT: 30 cm

MARTE

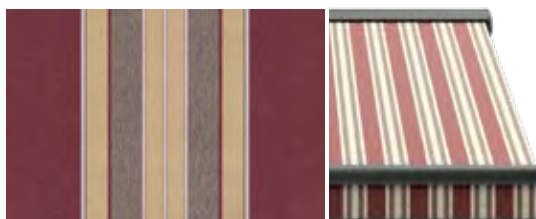


2121 UV: 99% GTOT: 11% RAPPORT: 24 cm

BOLOGNA

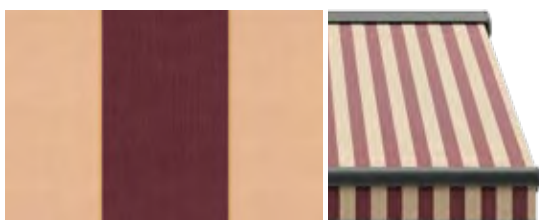


3427 UV: 90% GTOT: 22% RAPPORT: 20 cm

JAMAICA

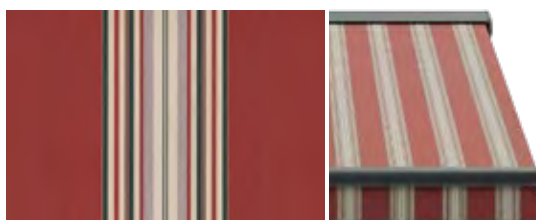


2701 UV: 98% GTOT: 14% RAPPORT: 30 cm

BRISBANE

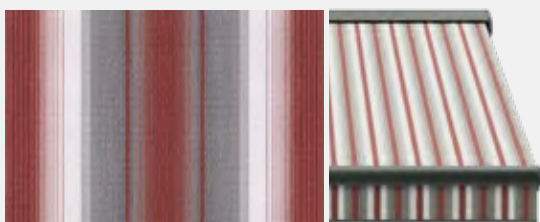


0186 UV: 98.1% G_{TOT}: 10.26% RAPPORT: 24 cm

EDMONTON

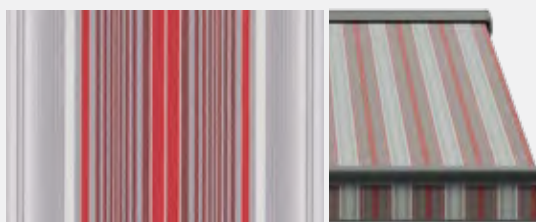


6711 UV: 98% G_{TOT}: 13% RAPPORT: 30 cm

WINTONE

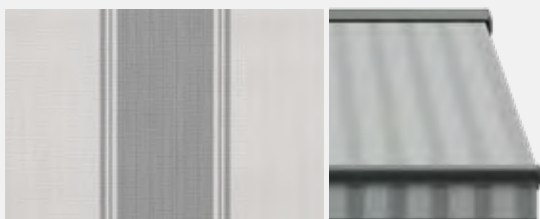


0734 UV: 97.5% G_{TOT}: 12.39% RAPPORT: 24 cm

FOGGIA

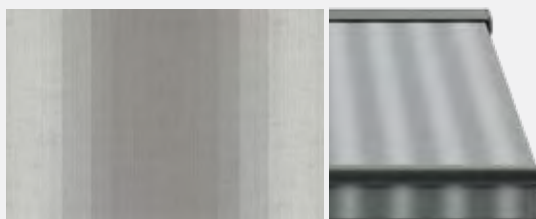


3864 UV: 95% G_{TOT}: 18% RAPPORT: 30 cm

BROKEN HILL

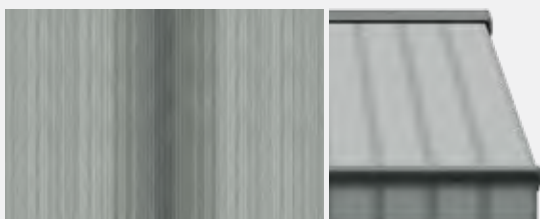

0497 UV: 95% G_{TOT}: 16% RAPPORT: 30 cm

NEW YORK

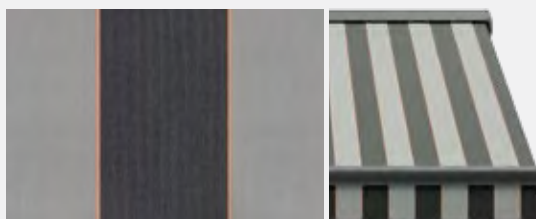


2174 UV: 98% G_{TOT}: 14% RAPPORT: 30 cm

METROPOLITAN




3608 UV: 99% G_{TOT}: 7% RAPPORT: 30 cm

GLADSTONE

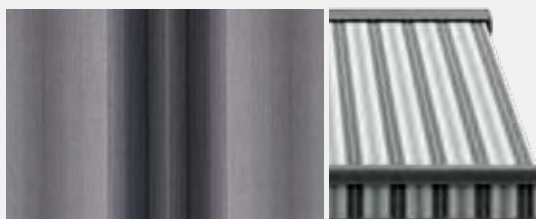


0493 UV: 99% G_{TOT}: 7.78% RAPPORT: 24 cm

SIENNE STONE

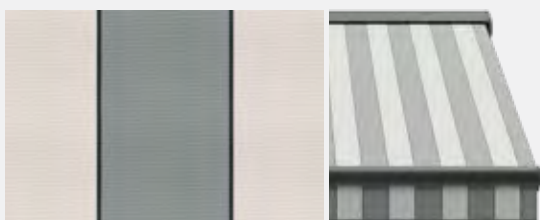


8931 UV: 95% G_{TOT}: 13% RAPPORT: 30 cm

PLUTON

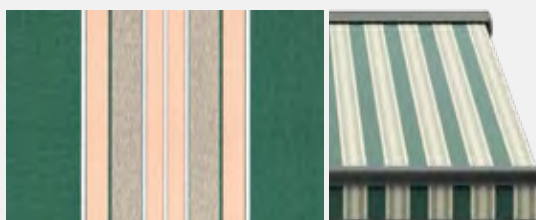


2179 UV: 99% G_{TOT}: 10% RAPPORT: 24 cm

RAVENNA

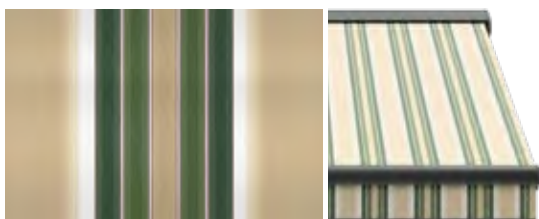


3882 UV: 95% G_{TOT}: 18% RAPPORT: 30 cm

FIRENZE

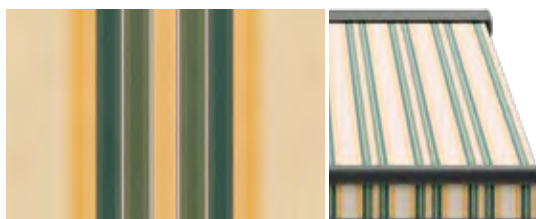


3889 UV: 90% G_{TOT}: 20% RAPPORT: 30 cm

MELBOURNE

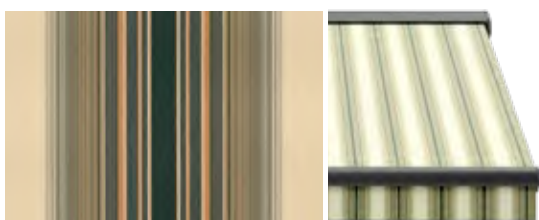

0054 UV: 99% G_{TOT}: 11.74% RAPPORT: 24 cm

ORLANDO

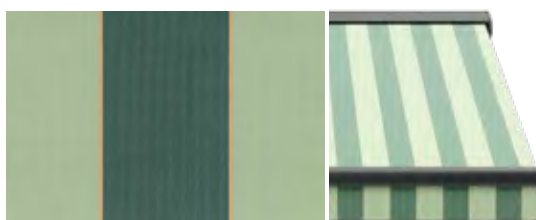


2191 UV: 98% G_{TOT}: 11% RAPPORT: 30 cm

CANADA



2061 UV: 99% G_{TOT}: 8% RAPPORT: 30 cm


PADOVA

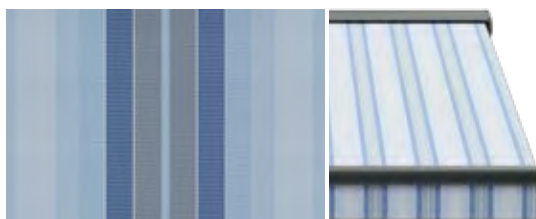

3875 UV: 95% G_{TOT}: 17% RAPPORT: 30 cm

FABRIC RAPPORT

ACRYLIC FABRICS

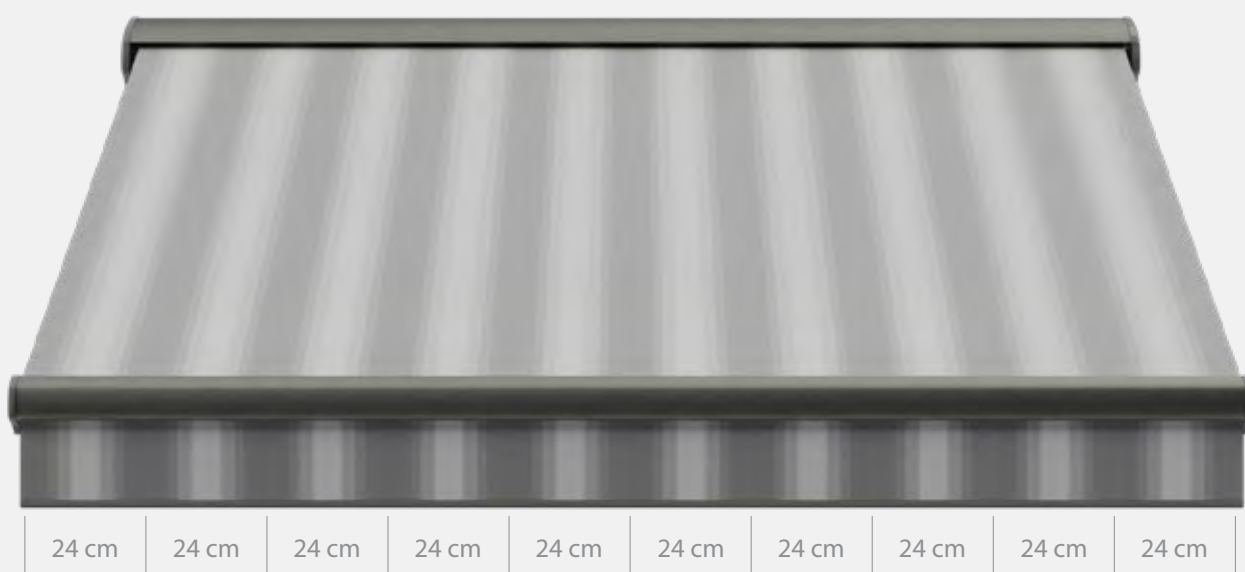


Multiply repeated pattern of fabric,
expressed in cm and given in the chart.



The image shows three layers of screen fabric. The top layer is a dark grey fabric with a fine, dense mesh. The middle layer is a medium grey fabric with a slightly larger, more pronounced mesh pattern. The bottom layer is a light grey fabric with a very fine, uniform mesh. The fabrics are draped and folded, creating a sense of depth and texture. The text "SCREEN FABRICS" is overlaid in the center, with "SCREEN" in a bold, white, sans-serif font and "FABRICS" in a regular, white, sans-serif font.

SCREEN FABRICS

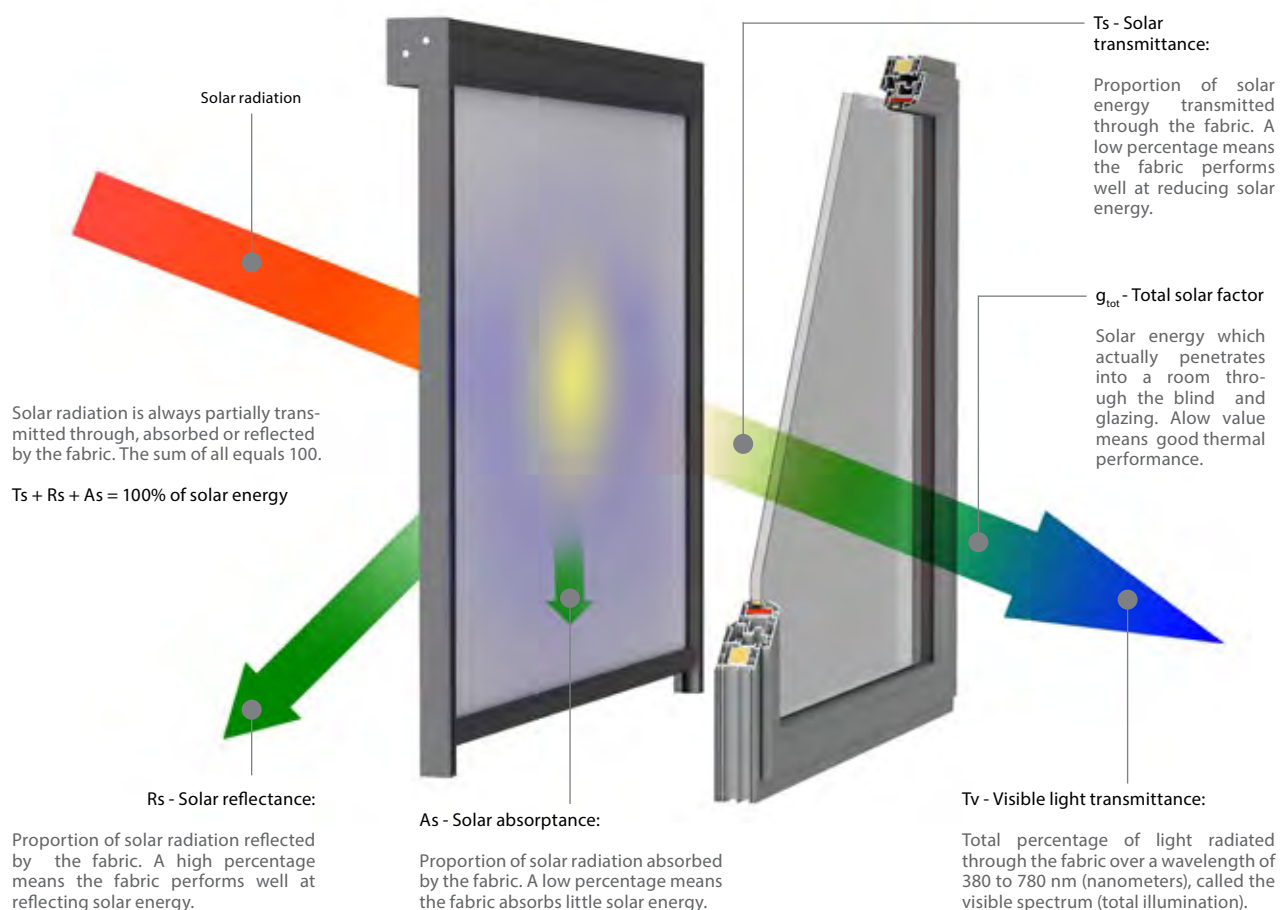

OPENNES FACTOR:

Relative area of the openings in the fabric. It is considered as independent of the colour.
For fabric with the same weave, it should be measured using the darkest colour in the range.

SERGE 1 % / SERGE 600

Collection of fabrics made from fiberglass covered with PVC. Fabrics made of this group have a distinctive diagonal „serge” weave, which guarantees them an unusual dimensional stability. High fire resistance and very good technical parameters of fabrics provide users with visual comfort in rooms, thus protecting against overheating the interior.

POLYSCREEN

Wide group of technical polyester fabrics coated with PVC, characterized by variety of weaving patterns and properties (PS Luminous, PS 550, PS 350). This allows architects to select the right solution, increasing visual attractiveness of the building and to emphasize its individual character. High technical parameters provide optical and thermal comfort inside the room. An additional feature of the fabric is the ease to keep it clean.

BLACK OUT

High-end blackout fabrics (Serge 600 BO Lunar, Polyscreen 314 BO) effectively block sunlight coming into the room. It is ideal solution for conference rooms, audio-visual, photographic studios, etc. High dimensional stability, high technical parameters and interesting colours are without a doubt advantages of fabrics in this group.

SUNWORKER


Smooth polyester fabric finished with PVC. Unique structure of the fabric effectively stops the sunlight, allowing for just optimal amount of visible light to transmit inside the room, providing high comfort to its users. The advantages of this fabric are: color fastness, high resistance to weather conditions and easy to maintain clean.

SOLTIS 92 / SOLTIS 99

Polyester technical fabric coated with PVC, manufactured with patented technology Precontraint Ferrari®. The unique technology gives fabric high stability and protects it against deformations even in large size blinds. High technical parameters guarantee optical and thermal comfort. The quality components used in production of this fabric ensures color fastness. Thanks to the smooth surface, the fabric is difficult to absorb dirt or get stained.

ACOUSTIC - VEROGLIM

Elegant fabric, made from the highest quality non-flammable polyester fibers Trevira® CS, intended for indoor use. Because of its weight, the fabric is ideally suited for cassette systems. An important advantage of this fabric is high coefficient of acoustics. Thanks to its structure, the fabric absorbs sound and mutes the room. Another advantage is metallic surface that reflects bright light and in this way regulates its intensity in the room.

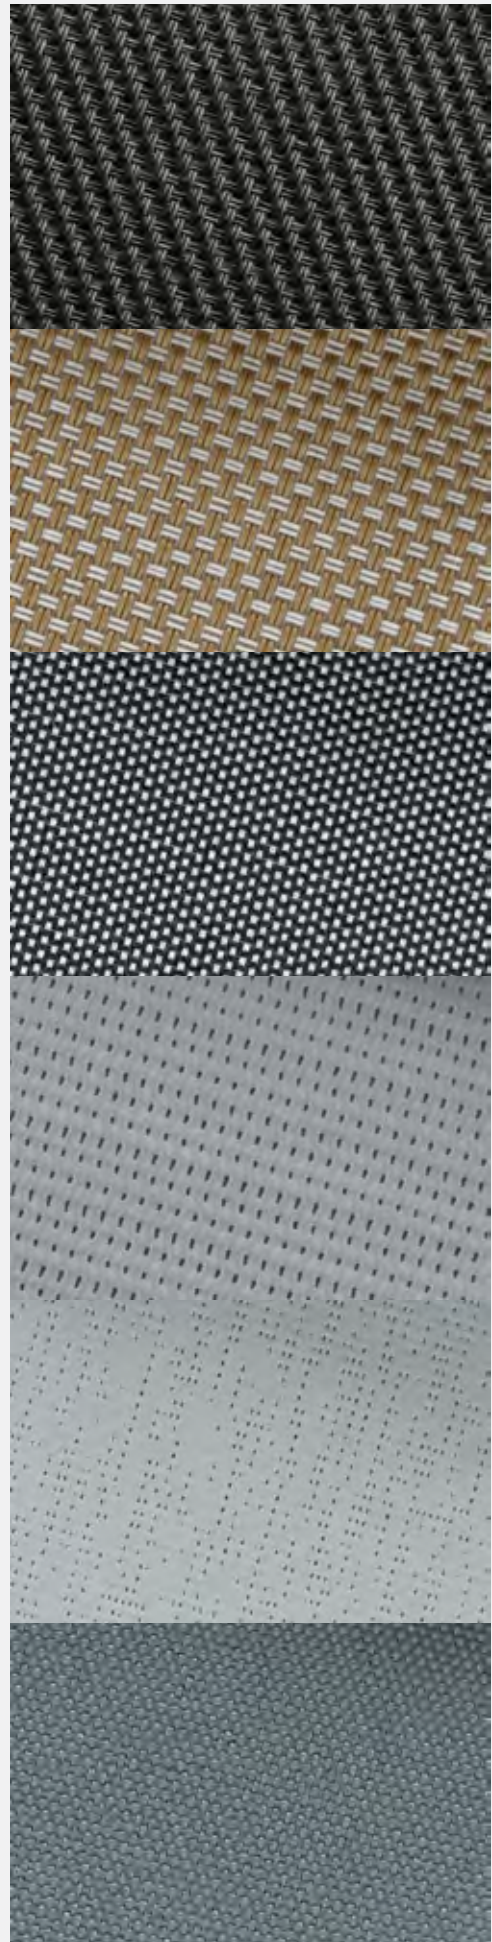

SERGE 600

WHITE - WHITE



60002002

GREY - WHITE




60001002

PEARL - GREY




60007007

GREY - GREY

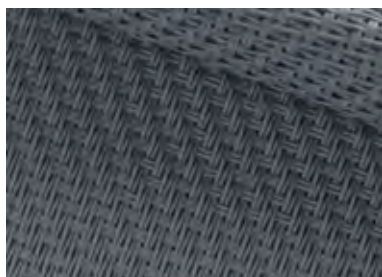


60001001

GREY - CHARCOAL

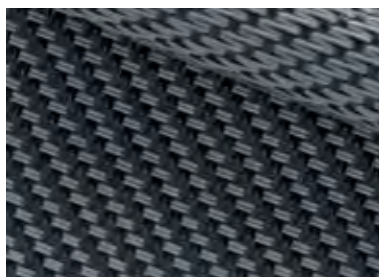

60001010


CHARCOAL - CHARCOAL

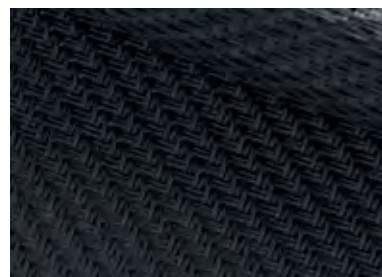

60010010

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02 EN ISO 105 B04	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
White-White 002002	42% glasfibre + 58% pvc	525	0,74	>7	5	21/21	65.9/66.3	13.2/12.7	21.2/21.2	interior / exterior
Grey-White 001002						6.7/6.7	37.2/26.9	56.2/66.4	6.6/6.6	
Pearl-Grey 007007						10.1/10.1	38.3/39.4	51.7/50.5	8.4/8.4	
Grey-Grey 001001						3.5/3.5	15.1/15.1	81.3/81.4	3.6/3.6	
Grey-Charcoal 001010						3.6/3.6	9.9/12.6	86.5/83.8	3.6/3.6	
Charcoal-Charcoal 010010						3.6/3.6	5.0/4.8	91.4/91.6	3.6/3.6	
Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 8.5, Weft: 7.5 Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 260, Weft: 225 Certificates: ask for availability										

SERGE 600



SERGE 600

PURE BLACK




60030030

CHARCOAL - BRONZE




60010011

SANDSTONE

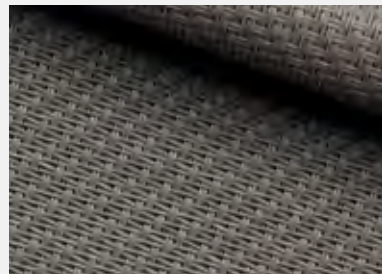


60033033

GREY - SAND

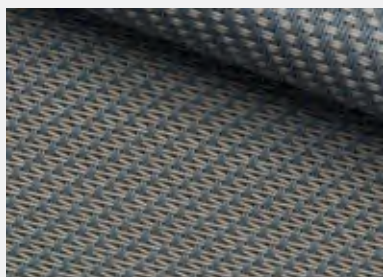

60001003

LINEN - LINEN

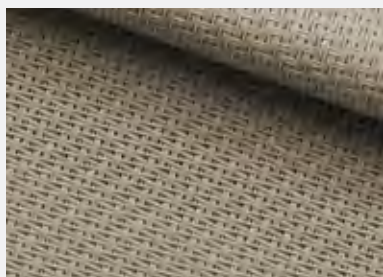

60008008


LINEN - WITE



60008002


	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02 EN ISO 105 B04	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
Pure Black 030030	42% glasfibre + 58% pvc	525	0.74	>7	5	5.9	3.7	90.4	5.9	interior / exterior
Charcoal-Bronze 010011						6.1	6.5/6.0	87.4/87.9	6.1	
Sandstone 033033						7.1	20.4/20.5	72.4/72.5	6.8	
Grey-Sand 001003						4.7	26.5/21.5	68.8/73.8	4.5	
Linen-Linen 008008						14.9	52.5/52.7	32.5/32.4	12.9	
Linen-White 008002						15.5	58.2/56.4	26.4/28.1	13.7	
Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 8.5, Weft: 7.5 Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 260, Weft: 225 Certificates: ask for availability										

SERGE 600




SERGE 1%

WHITE - WHITE

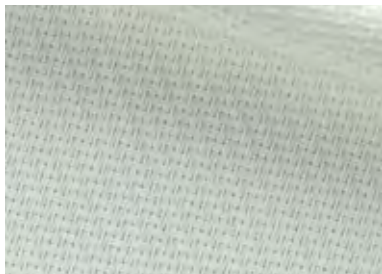


61002002

GREY - WHITE

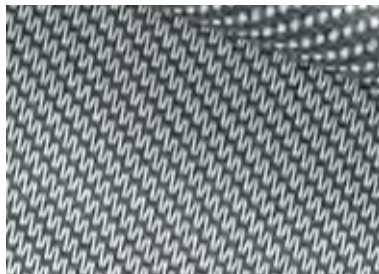

61001002

PEARL - GREY

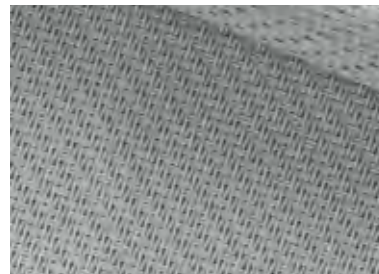


61007007

GREY - GREY




61001001

GREY - CHARCOAL

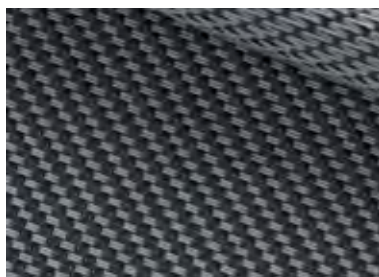


61001010

CHARCOAL - CHARCOAL

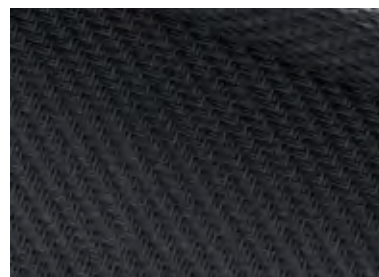


61010010

BRONZE - BRONZE

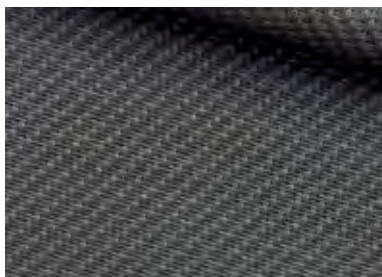

61011011


LINEN - LINEN

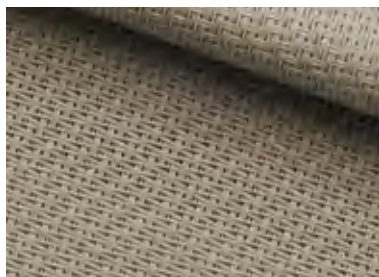

61008008

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02 EN ISO 105 B04	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
White-White 002002	42% glasfibre + 58% pvc	638	0.78	>7	1	12.8	71.3	15.9	12.9	interior / exterior
Grey-White 001002						2.2	44.8/31.2	53/66.6	2	
Pearl-Grey 007007						2.8	36.9	60.3	2.1	
Grey-Grey 001001						2.4	17.4	80.2	2.2	
Grey-Charcoal 001010						1.2	10.5/14	88.3/84.8	1.2	
Charcoal-Charcoal 010010						1.1	5.9	93	1.1	
Bronze-Bronze 011011						1.4	8.6	90	1.3	
Linen-Linen 008008						5.9	54.2	39.9	3.7	
Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 5.9, Weft: 6.2 Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 321, Weft: 277 Certificates: ask for availability										

SERGE 1%



SERGE 600 BO LUNAR

WHITE - WHITE



6BO002002

WHITE - PERL GREY




6BO002007

PEARL GREY - PEARL GREY



6BO007007

WHITE - GREY

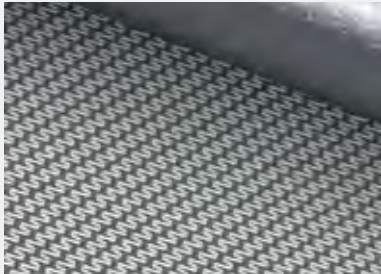


6BO001002

OYSTER SHELL




6BO033001

GREY - GREY

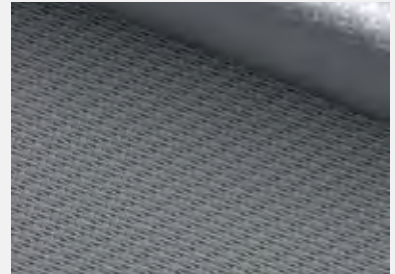

6BO001001

GREY - CHARCOAL

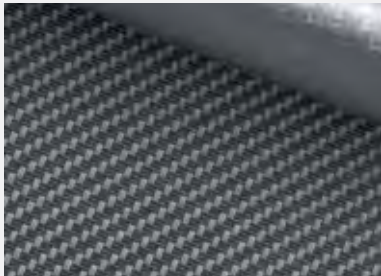

6BO001010

CHARCOAL - CHARCOAL




6BO010010

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02 EN ISO 105 B04	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
White-White 002002	33% GLASFIBRE 47% PVC 20% PVC LAMINATE	678	0.73	>7	0	0	68.8/33.7	31.2/66.3	0	interior / exterior
White-Perl Grey 002007						0	47.8/33.2	52.2/66.8	0	
Pearl Grey-Pearl Grey 007007						0	35.5/34	64.5/66	0	
White-Grey 001002						0	40.3/33.7	59.7/66.3	0	
Oyster Shell 033001						0	18.2/33.4	81.8/66.6	0	
Grey-Grey 001001						0	17.2/33.1	82.8/66.9	0	
Grey-Charcoal 001010						0	11/33.7	89/66.3	0	
Charcoal-Charcoal 010010						0	6.2/33.4	93.8/66.6	0	

Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 8.5, Weft: 9
 Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 224.2, Weft: 176.6
 Certificates: ask for availability


SERGE 600 BO LUNAR

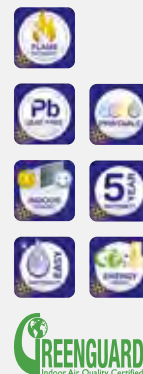

ESSENTIAL 5

(POLYSCREEN 550)

ASH (EBONY - GREY)

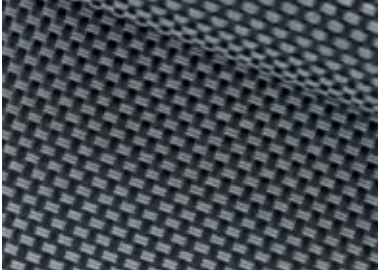


10550017

PEARL - GREY




10550013

WHITE - GREY

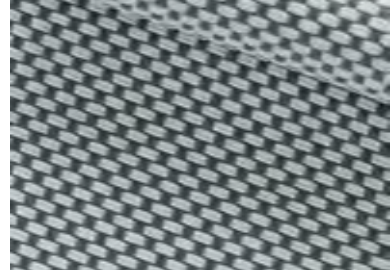


10550012

WHITE - PEARL

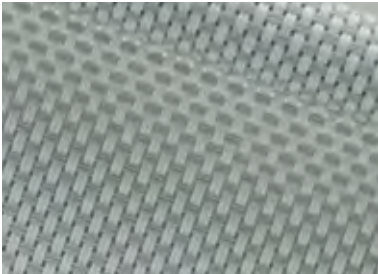


10550011

PEARL - SAND

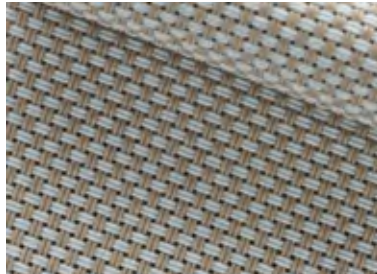

10550023

PEARL - LINEN

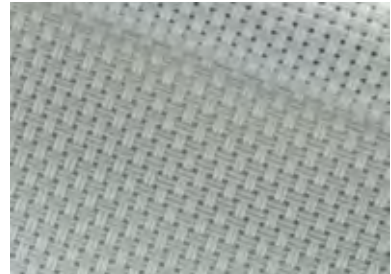


10550021

WHITE - LINEN



10550019

WHITE

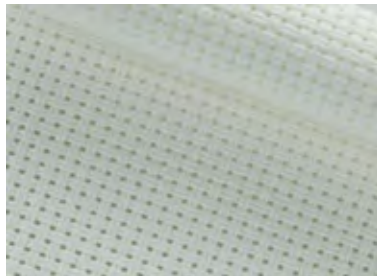

10550009

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
	85% PVC + 15% PES	60 ± 5%	0.78 ± 5%			5	TS [%]	RS [%]	AS [%]	TV [%]	interior / exterior
Ash (Ebony - Grey)				8 / 8	5 / 5		6	7	87	6	
Pearl - Grey				8 / 8	5 / 5		11	29	60	9	
White - Grey				≥ 7/8	≥ 4/5		13	37	50	12	
White - Pearl				≥ 7/8	≥ 4/5		16	57	27	12	
Pearl - Sand				8 / 8	5 / 5		14	36	50	10	
Pearl - Linen				8 / 8	5 / 5		17	46	37	12	
White - Linen				≥ 7/8	≥ 4/5		20	63	17	16	
White				7 / 8	4 / 5		19	69	12	15	

Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp: 6.6, Weft: 5.3
 Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 174, Weft: 133
 Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 22, Weft: 21
 Certificates: ask for availability

ESSENTIAL 5
(POLYSCREEN 550)



0338

ESSENTIAL 5

(POLYSCREEN 550)

EBONY - GOLD




10550051

LINEN - GOLD




10550053

GREY - SILVER

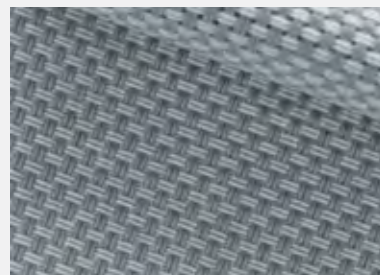


10550042

COUPAGE 1

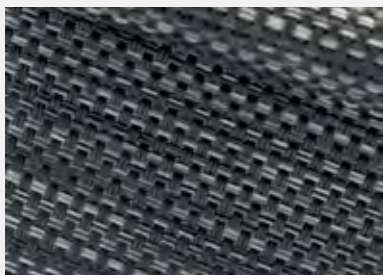

10550031

COUPAGE 2

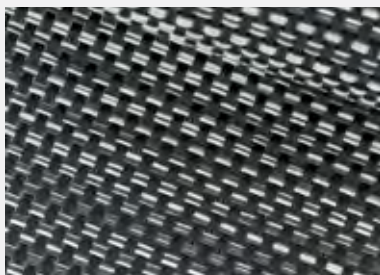

10550032

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
							TS [%]	RS [%]	AS [%]	TV [%]	
Ebony - Gold	85% pVC + 15% PES	610 ± 5%	0.78	8 / 8	5 / 5	5	11	8	81	10	interior / exterior
Linen - Gold							13	25	62	14	
Grey - Silver							16	17	67	17	
Coupage 1							-	-	-	10	
Coupage 2							-	-	-	12	
Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp 6,6 , Weft 5,3 Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp 174, Weft 133 Stretch (%) UNE EN ISO 13934-1:1999 - Warp 22 , Weft 21 Certificates: ask for availability											


ESSENTIAL 5
(POLYSCREEN 550)



ETHEREAL 10


(POLYSCREEN 350)

ASH (EBONY - GREY)

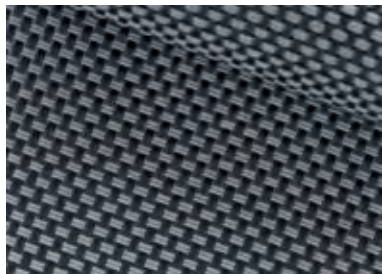

10550017

PEARL - GREY

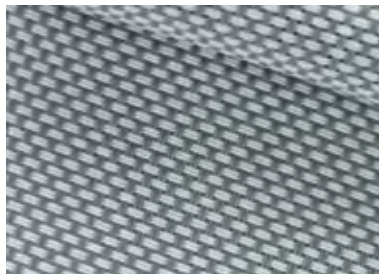

10550013

WHITE - LINEN



10350019

WHITE



10350009

	composition	weight [g/m ²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
							TS [%]	AS [%]	AS [%]	TV [%]	
Ash (Ebony - Grey)	PES	400 ± 5%	0.53 ± 5%	8 / 8	5 / 5	10	10	8	82	10	interior
Pearl - Grey				8 / 8	5 / 5		16	26	58	14	
White - Linen				≥7/8	≥ 4/5		27	58	15	23	
White	80% PVC + 20% PES			7 / 8	4 / 5		25	64	11	22	
Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp: 5.6, Weft: 5.1 Breaking resistance (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 182, Weft: 152 Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 21, Weft: 19 Certificates: ask for availability											

ETHEREAL 10
(POLYSCREEN 350)



0338

SILKEN BO

(POLYSCREEN 314 BO)

EBONY - GREY




10314B20

EBONY - LINEN




10314B08

LINEN - BRONZE

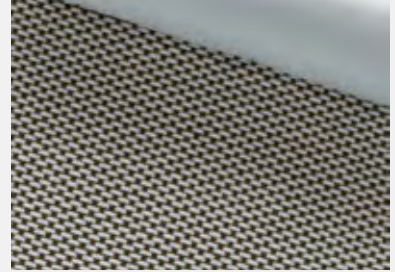

10314B06

WHITE

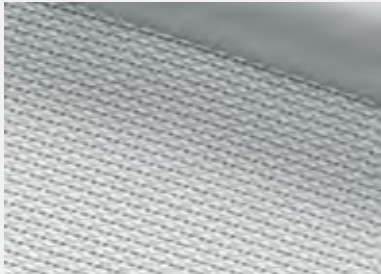


10314B02

LINEN - SAND



10314B04

EBONY - SAND

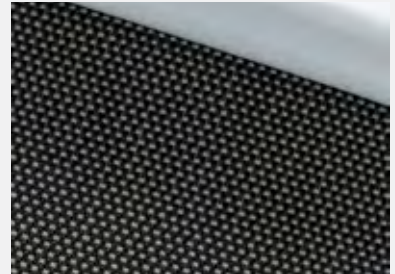

10314B10

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	EN 14501				application
Ebony - Grey	80% PVC + 20% PES coated with PVC	610 ± 5%	0.66 ± 5%	8 / 8	4 / 5	0	0	36	64	0	interior
Ebony - Linen				8 / 8							
Linen - Bronze				8 / 8							
White				7 / 8							
Linen - Sand				8 / 8							
Ebony - Sand				8 / 8							
Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp: 4.4, Weft: 2.5 Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 147, Weft: 91 Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 26.7, Weft: 17.6 Certificates: ask for availability											

SILKEN BO
(POLYSCREEN 314 BO)



0338

SOLTIS VEOZIP

GRAPHITE BLACK



51198

GREY PEPPER




51197

SHADOW



51194

SEA LION

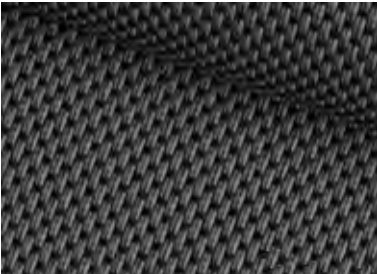

51192

EDELWEISS



51185


	composition	weight [g/m²]	thickness [mm]	light fastness grey scale level ISO 105 A02 1993	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
Graphite Black 51198	25% Polyester + 74% PVC + 1% Hemp fiber	600	0.9	5 / 5	4	5	5	90	5	interior / exterior
Grey Pepper 51197						5	8	87	5	
Shadow 51194						5	7	88	5	
Sea Lion 51192						8	13	79	7	
Edelweiss 51185						9	50	41	8	
Tear resistance (daN) DIN 53.363 - Warp: 25, Weft: 25 Breaking resistance (daN/5cm) EN ISO 1421 - Warp: 250, Weft: 170 Certificates: ask for availability										

SOLTIS VEOZIP



SOLTIS VEOZIP

FROST WHITE

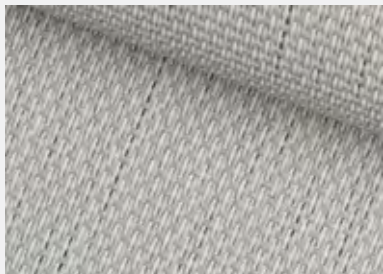


51184

CUMULUS




51186

NATURAL

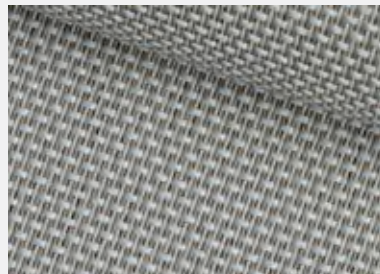


51187

TUNDRA

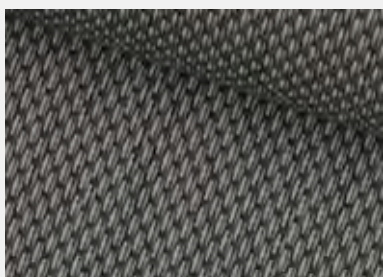

51190

LUNAR SURFACE

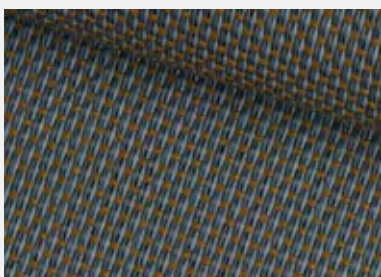

51191


	composition	weight [g/m²]	thickness [mm]	light fastness grey scale level ISO 105 A02 1993	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
Frost White 51184	25% Polyester+ 74% PVC + 1% Hemp fiber	600	0.9	>4 / 5	5	9	59	32	8	interior / exterior
Cumulus 51186				>3 / 5		6	37	57	6	
Natural 51187				4 / 5		7	37	56	7	
Tundra 51190				4 / 5		6	27	67	5	
Lunar Surface 51191				5 / 5		7	18	75	6	
Tear resistance (daN) DIN 53363 - Warp: 25, Weft: 25 Breaking resistance (daN/5cm) EN ISO 1421 - Warp: 250, Weft: 170 Certificates: ask for availability										

SOLTIS VEOZIP




SOLTIS 92

DEEP BLACK

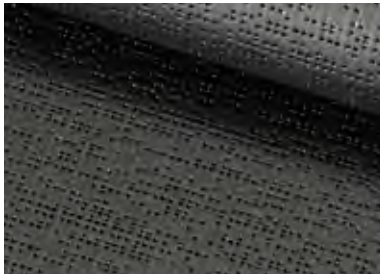

509251176

CHARCOAL

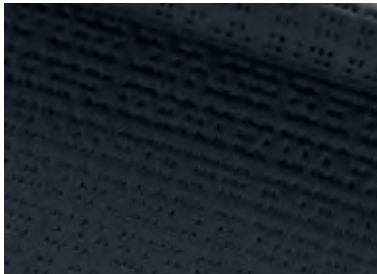


50922047

CONCRETE




50922167

SILVER

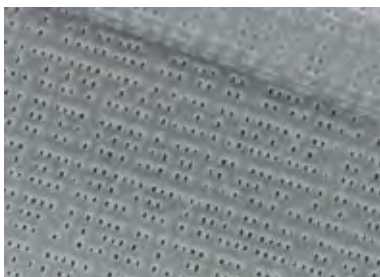

50922048

SILVER BLACK

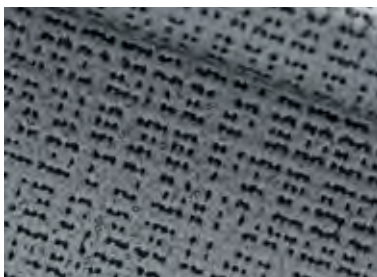

50922045

SILVER - WHITE



50922051

SANDY BEIGE



50922135

WHITE



50922044

	composition	weight [g/m²]	thickness [mm]	light fastness grey scale level ISO 105 A02 1993	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
Deep Black 51176	Polyester / PVC	420	0.45	5 / 5	4	3	5	92	3	interior / exterior
Charcoal 2047				5 / 5		5	8	87	5	
Concrete 2167				4 / 5		6	19	75	5	
Silver 2048				4 / 5		8	46	46	8	
Silver Black 2045				5 / 5		4	35	61	4	
Silver-White 2051				4 / 5, 3-4 / 5		12 / 12	49 / 70	39 / 18	11 / 11	
Sandy Beige 2135				5 / 5		11	46	43	8	
White 2044				3-4 / 5		19	68	13	17	
Tear strength (daN) DIN 53.363 - Warp: 45, Weft: 20 Tensile strength (daN/5cm) EN ISO 1421 - Warp: 310, Weft: 210 Certificates: ask for availability										

SOLTIS 92



SOLTIS 99

WHITE



50992055

QUARTZ




509950285

SANDY BEIGE



509950286

SPUME

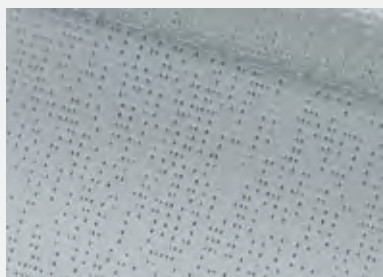


509950284

LIGHT GREY



50992058

ALU

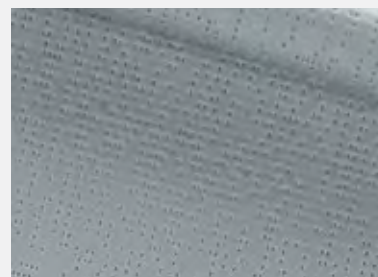

50992059

ANTRACITE



50992068

	composition	weight [g/m ²]	thickness [mm]	light fastness grey scale level ISO 105 A02 1993	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
White 2055	Polyester / PVC	290	0.32	5 / 5, 3-4 / 5	3	14 / 14	47 / 63	39 / 23	13	interior
Quartz 50285				5 / 5, 5 / 5		11 / 11	47 / 60	42 / 29	9	
Sandy Beige 50286				5 / 5, 5 / 5		10 / 10	43 / 44	47 / 46	7	
Spume 50284				5 / 5, 4-5 / 5		12 / 12	47 / 60	41 / 28	9	
Light Grey 2058				5 / 5, 5 / 5		8 / 8	44 / 43	48 / 49	6	
Alu 2059				5 / 5, 5 / 5		6	43	51	5	
Antracite 2068				5 / 5, 5 / 5		3 / 3	33 / 8	64 / 89	3	

Tear strength (daN) DIN 53.363 - Warp: 11, Weft: 13
Tensile strength (daN/5cm) EN ISO 1421 - Warp: 160, Weft: 170
Certificates: ask for availability

SOLTIS 99




SUNWORKER

WHITE



40SWK005

IRON

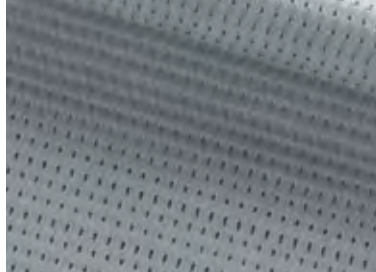

40SWK653

CHAMPAGNE



40SWK711

CHARCOAL



40SWK392


	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 105 B04	openness factor [%]	EN 14501				application
							TS [%]	RS [%]	AS [%]	TV [%]	
White SWK005	Polyester / PVC	300	0.42	7 / 8	4-5 / 5	6	23	66	11	21	interior / exterior
Iron SWK653						6	12	35	53	10	
Champagne SWK711						6	21	50	29	18	
Charcoal SWK392						6	6	7	87	6	
Tearing strength (daN/5cm) DIN 53.363 - Warp: 43, Weft: 22 Tensile strength (daN/5cm) NF EN ISO 13934-1 - Warp: 220, Weft: 150 Certificates: ask for availability											

SUNWORKER




VEROGLIM ACOUSTIC

GREY - SILVER

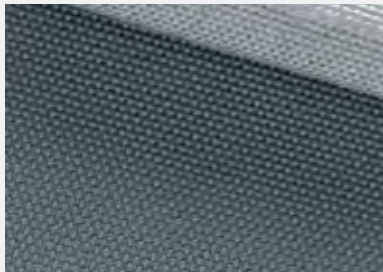


34022115

LIGHT GREY - SILVER

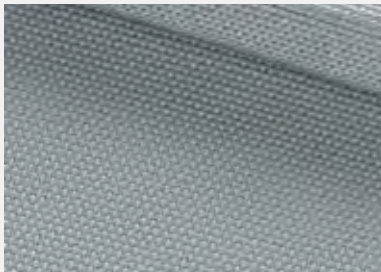


34022114

WHITE - SILVER

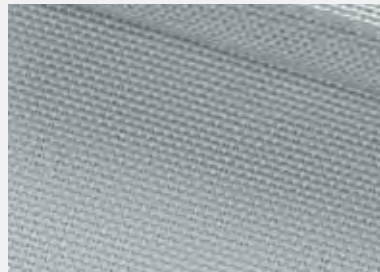

34022111

IVORY - SILVER

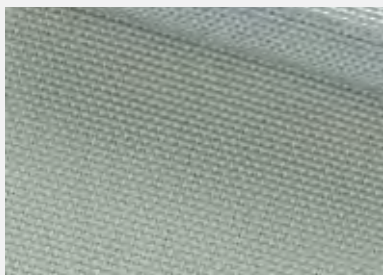

34022113

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	openness factor [%]	DIN EN 410				application
						TS [%]	RS [%]	AS [%]	TV [%]	
Grey-Silver 115	Trevira CS	220	0.43	5-6 / 8	1	5	50	45	2	interior
Light Grey-Silver 114						5	52	43	4	
White-Silver 111						7	52	41	7	
Ivory-Silver 113						6	49	45	6	

Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 95, Weft:130
Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 35, Weft: 23
Certificates: ask for availability

VEROGLIM ACOUSTIC



$\alpha_w = 60\%$



PERGOLA SOLID FABRICS




PRECONTRAI NT 602 OPAQUE


Technical specifications

	Values	Standards
Yarn	1100 dtex PES HT	Tersuisse
Weight	750 g/m ²	EN ISO 2286-2
Width	267 cm	-
Tensile strength (warp/weft)	230/220 daN/5cm	EN ISO 1421
Tear strenght (warp/weft)	20/20 daN	DIN 53.363
Elongation under load (warp/weft)	<1%/<1%	NF EN 15619
Adhesion	9/9 daN/5cm	EN ISO 2411
Finish	Varnish both sides	-
Flame retardancy	• M2/NFP 92-507 • B1/DIN4102-1 • M2/UNE23.727-90 • BS 7837 • 1530.3/AS NZS • Method 2/NFPA 701 • CSFM T19 •	
Cold resistance	-30°C	ISO 4675
Heat resistance	+70°C	

BLANC 602N OPAQUE 8503

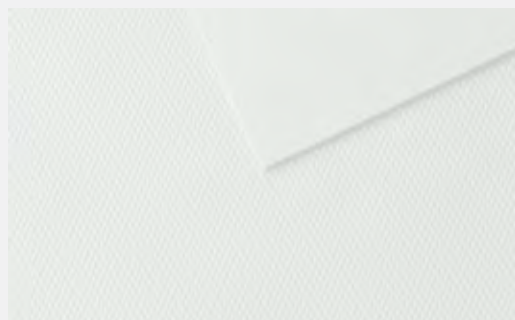

BEIGE 602N OPAQUE 0020

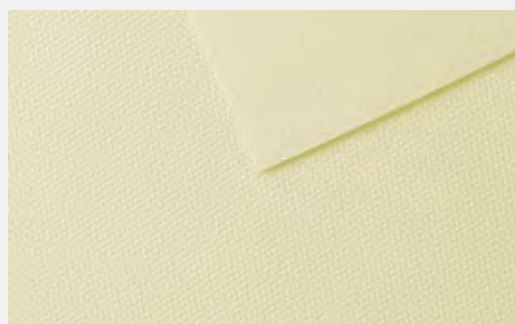


PRECONTRAI NT 702 OPAQUE


Technical specifications

	Values	Standards
Yarn	1100 dtex PES HT	Tersuisse
Weight	830 g/m ²	EN ISO 2286-2
Width	267 cm	
Tensile strength (warp/weft)	280/280 daN/5 cm	EN ISO 1421
Tear strength (warp/weft)	30/28 daN	DIN 53.363
Adhesion	10/10 daN/5 cm	EN ISO 2411
Finish	Acrylic varnish both sides Aluminium face / Back grey	
Flame retardancy	M2/NFP 92-507 • TEST 2/NFPA 701 • CSFM T19 • B1/DIN 4102-1 • BS 7837 • GROUP 1/AS/ NZS 3837 • 1530.3/AS/NZS • SITAC/SIS 650082 • Schwerbrennbar Q1-Tr1/ONORM A 3800-1 • CLASSE 2/UNI 9177-87 • M2/UNE 23.727-90 • VKF 5.2/SN 198898 • B-s2,do/EN 13501-1	
Cold resistance	-30°C	
Heat resistance	+70°C	

ALU WHITE 702 OPAQUE 1284

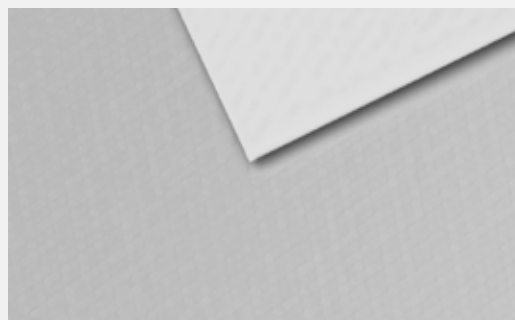


ALU GREY 702 OPAQUE 1285

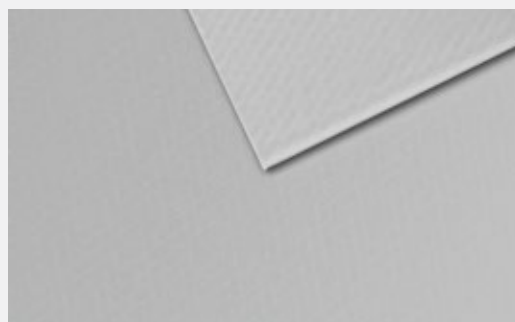

SELT COLOURS

COATING FINISH

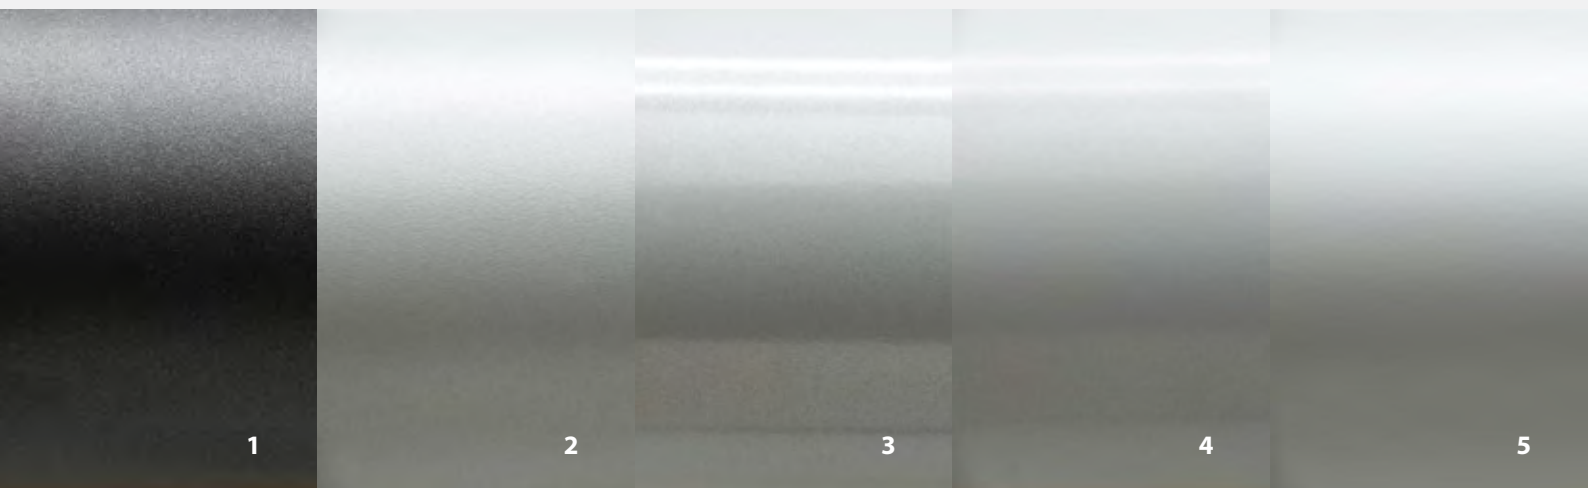

1. *"fine structure - pearl mat"*
2. *"fine structure"*
3. *satın finish*
4. *mat finish*
5. *"artificial anode"*

CONSTRUCTION COLOURS

Presented colour chart shows colours available within Selt collection for powder coated construction elements of Refleksols, venetian blinds and sunbreakers. Conditions of painting in colours included in the collection below and in other RAL colours – according to rules described in price lists of individual products. Because of technical and production reasons as well as due to different coating techniques, differences in colours between product components are possible. Presented pictures are for illustration purposes only. Colours may vary from actual ones. Any difference in shade does not constitute grounds for complaint.

SLATS COLOURS


Presented colour chart shows slat colours available within SELT collection. Conditions of painting in colours within Selt collection and other RAL colours – according to rules described in price list of venetian blinds. Because of technical and production reasons as well as due to different coating techniques, differences in colours between product components are possible. Presented pictures are for illustration purposes only. Colours may vary from actual ones. Any difference in shade does not constitute grounds for complaint. Customized perforation (layout and size of openings) and painting in colours outside of SELT collection are subject to individual arrangements in terms of price and conditions of implementation.



SLAT COLOURS

C50 / C80 / C80F / Z90

RAL 1013



C80 / Z90

RAL 7012



C80 / Z90

RAL 7016



C50 / C80 / C80F / Z90

RAL 7021




C80 / Z90

RAL 7024




C80 / Z90

RAL 7035




C80 / Z90

RAL 8014



C80 / Z90

RAL 9005



C80 / Z90

RAL 9006




C50 / C80 / C80F / Z90

RAL 9007




C50 / C80 / C80F / Z90

RAL 9010



C50 / C80 / C80F / Z90

RAL 9016




C80

DB 703



C80 / Z90

VSR 240



C80 / Z90

VSR 780




C80 / Z90

SLAT COLOURS


C50 SLIM

0005 (~ RAL 1013)



C50 SLIM

0204 (~ RAL 9003)




C50 SLIM

0030




C50 SLIM

0038 (~ RAL 9006)




C50 SLIM

9007 (~ RAL 9007)



C50 SLIM

2901




C50 SLIM

0199 (~ RAL 7024)



C50 SLIM

0019 (~ RAL 9011)



C50 SLIM

0204 PF (~ RAL 9003)




C50 SLIM


CONSTRUCTION

COLOURS

RAL 1013 MAT



RAL 1015 MAT



RAL 7001 MAT



RAL 7012 MAT



RAL 7015MAT



RAL 7016 MAT



RAL 7021 MAT



RAL 7022 MAT



RAL 7024 MAT



RAL 7035 MAT



RAL 7037 MAT



RAL 7039 MAT



RAL 7043 MAT



RAL 8003 MAT



RAL 8014 MAT




CONSTRUCTION

COLOURS

RAL 8016 MAT



RAL 9001 MAT



RAL 9005 MAT




RAL 9006 MAT




RAL 9007 MAT



RAL 9010 MAT



RAL 9016 MAT



DB 703 MAT




VSR 240 SATIN



VSR 780 MAT



FSM 71319 MAT





SELT

COMPANY

All specifications, design and color of products are up to date at time of forwarding this catalogue to print. The manufacturer reserves the right to make changes without prior notice. Due to the printing process any color reproductions are for illustration purposes only, their deviation from the actual color cannot constitute grounds for complaint. Folder reproduction in whole or in part is forbidden without the written permission of SELT.

selt.com